


Elbow 90°

with beaded, round and unperforated side profiles, but with connector perforations

WRBR 105.200 F

EAN Code: 4013339950218

the photorealistic images are to be considered as reference images

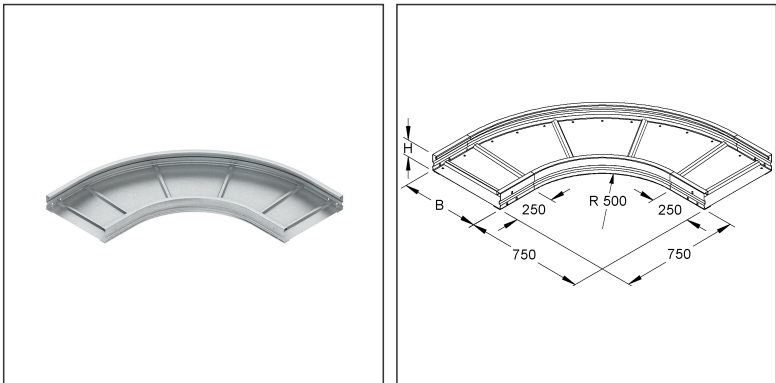

Article Description

Elbow 90° for WRL, 105x200 mm, round, beaded, unperforated, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

|               |     |
|---------------|-----|
| Article group | N13 |
|---------------|-----|

Weight

|                          |         |
|--------------------------|---------|
| Weight per quantity unit | 11 kg   |
| Weight in kg per 100     | 1058 kg |

Physical Article Dimensions

|              |           |
|--------------|-----------|
| Height       | 105.00 mm |
| Width        | 950 mm    |
| Depth/length | 950 mm    |

# Technical Datasheet

## Long Span Cable Tray

WRBR 105.200 F

the photorealistic images are to be considered as reference images

### Packing Dimension

|                          |        |                                     |          |        |           |
|--------------------------|--------|-------------------------------------|----------|--------|-----------|
| <b>1 piece = 1 piece</b> |        | ✓ VP1-smallest packaging unit ( PU) |          |        |           |
| Lenght                   | 950 mm | Width                               | 950 mm   | Height | 105.00 mm |
| Gross weight             | 11 kg  | Volume                              | 0,095 m³ |        |           |
| Min. quantity            | 1      | Max. Quantity                       | 1        |        |           |

### Tender Text

Elbow 90°, with beaded, round and unperforated side beams, with connector perforation for the connection, for wide span cable trays, dimensionally stable due to the beaded and unperforated bottom riveted over the entire surface, for creating horizontal 90° outlets. Please order splice plates WSV 105.390 separately. The fitting radii are designed so that the cables can be laid in accordance with DIN/VDE 0298 Part 3.

Butt joints must be supported in the immediate vicinity by an appropriate supporting structure.

For wide span cable tray : WRL 105...

WRU 105...

Dimensions (approx. dimensions)

Height H x Width W : 105 x 200 mm

Dimensions outside : 750 mm + W

inside beam radius R : 500 mm

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : WRBR 105.200 F

EP Material\_\_\_\_\_ EP Wage\_\_\_\_\_

Unit price/piece

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 23.01.2024  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                       |          |
|-----------------------|----------|
| Country of origin     | DE       |
| Customs tariff number | 73089059 |

### Related items

#### Cover

| Model No.   | Description                                                                                                                   |
|-------------|-------------------------------------------------------------------------------------------------------------------------------|
| WBRDV 200 F | Cover for elbow 90° for WSL/WRL, width 204 mm, with turning lock, steel, hot dip galvanised DIN EN ISO 1461                   |
| WDRS 20 F   | Turning bolt with locknut acc. to DIN EN ISO 10511, for WSL/WRL, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories |

# Technical Datasheet

## Long Span Cable Tray

WRBR 105.200 F

the photorealistic images are to be considered as reference images

Related items

Connector

| Model No.     | Description                                                                              |
|---------------|------------------------------------------------------------------------------------------|
| WSV 105.390 F | Splice plate, 106,5x390 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories |