

BC HYDRO - 100A-800A Service Entrance Breaker Boxes - CSA 1



Designed as a replacement in a secondary service for a fused disconnect to meet the requirements set out by BC Hydro in ES54 S0-04 R1. Includes the box, breaker and isolated neutral as a certified assembly. Certified for use as service entrance.

CSA Certified Enclosure; Assembly Certified Under SPE-1000

- Padlockable Hinged Cover
- Breaker Lockout provision
- Isolated Neutral
- Powder Coated Steel Construction
- Thermal Magnetic Trip Breaker, Sized For Voltage for BC Hydro Service

Options available:

- Custom size enclosures
- Custom color powder coating
- 3R, 4 or 4X Rated Enclosure
- Various Breaker Options
- Brand matched breaker

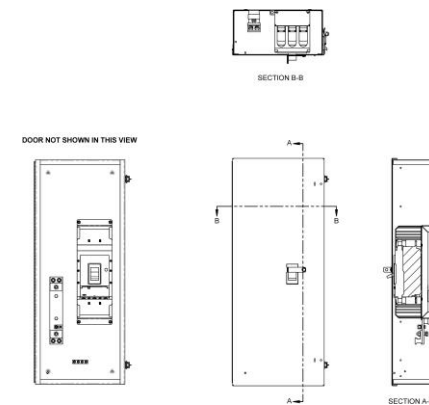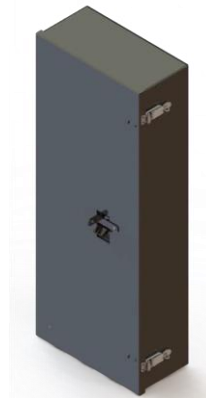

CAT No:	MAIN BREAKER	PHASE	VOLTAGE	SIZES
BCHBRK-0100-1-240	100A	1	22kA @ 120/240V	24 x 8.5 x 6
BCHBRK-0100-3-208	100A	3	45kA @ 120/208V	24 x 8.5 x 6
BCHBRK-0100-3-600	100A	3	45kA @ 347/600V	35 x 14 x 7
BCHBRK-0200-1-240	200A	1	22kA @ 120/240V	24 x 8.5 x 6
BCHBRK-0200-3-208	200A	3	45kA @ 120/208V	24 x 8.5 x 6
BCHBRK-0200-3-600	200A	3	45kA @ 347/600V	35 x 14 x 7
BCHBRK-0400-1-240	400A	1	22kA @ 120/240V	35 x 14 x 7
BCHBRK-0400-3-208	400A	3	45kA @ 120/208V	35 x 14 x 7
BCHBRK-0400-3-600	400A	3	45kA @ 347/600V	35 x 14 x 7
BCHBRK-0600-3-600	600A	3	45kA @ 347/600V	35 x 14 x 7
BCHBRK-0600-1-240	600A	1	22kA @ 120/240V	35 x 14 x 7
BCHBRK-0600-3-208	600A	3	45kA @ 120/208V	35 x 14 x 7
BCHBRK-0800-3-208	800A	3	45kA @ 120/208	40 x 12 x 16
BCHBRK-0800-3-600	800A	3	45kA @ 347/600V	40 x 12 x 16

*For custom options, speak with your sales representative.

BC HYDRO / FORTIS

BACK