


Elbow 90°

with beaded, round and unperforated side profiles, but with connector perforations

WRBR 150.400 F

EAN Code: 4013339950287

the photorealistic images are to be considered as reference images

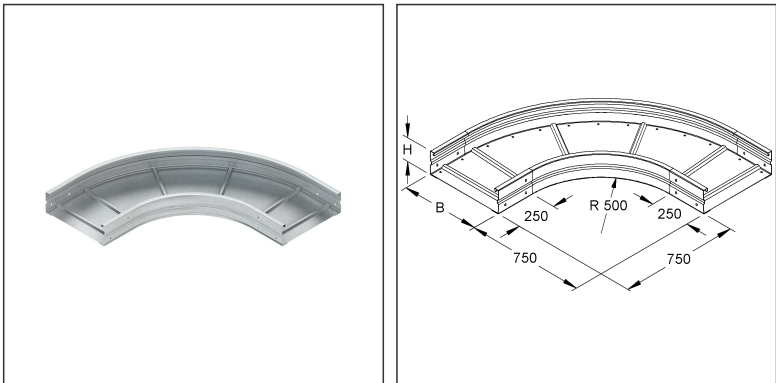

Article Description

Elbow 90° for WRL, 150x400 mm, round, beaded, unperforated, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
---------------	-----

Weight

Weight per quantity unit	17 kg
Weight in kg per 100	1650 kg

Physical Article Dimensions

Height	150.00 mm
Width	1150 mm
Depth/length	1150 mm

Technical Datasheet

Long Span Cable Tray

WRBR 150.400 F

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	1150 mm	Width	1150 mm	Height	150.00 mm
Gross weight	17 kg	Volume	0,198 m³		
Min. quantity	1	Max. Quantity	1		

Tender Text

Elbow 90°, with beaded, round and unperforated side beams, with connector perforation for the connection, for wide span cable trays, dimensionally stable due to the beaded and unperforated bottom riveted over the entire surface, for creating horizontal 90° outlets. Please order splice plates WSV 150.500 separately. The fitting radii are designed so that the cables can be laid in accordance with DIN/VDE 0298 Part 3.

Butt joints must be supported in the immediate vicinity by an appropriate supporting structure.

For wide span cable tray : WRL 150...

WRU 150... WRLM 150...

Dimensions (approx. dimensions)

Height H x Width W : 150 x 400 mm

Dimensions outside : 750 mm + W

Inside beam radius R : 500 mm

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : WRBR 150.400 F

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Cover

Model No.	Description
WBRDV 400 F	Cover for elbow 90° for WSL/WRL, width 404 mm, with turning lock, steel, hot dip galvanised DIN EN ISO 1461
WDRS 20 F	Turning bolt with locknut acc. to DIN EN ISO 10511, for WSL/WRL, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Technical Datasheet

Long Span Cable Tray

WRBR 150.400 F

the photorealistic images are to be considered as reference images

Related items

Connector

Model No.	Description
WSV 150.500 F	Splice plate, 151,5x500 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories