


LED RIBBON WIRING EXAMPLE

High Density (5W/Ft.)

To avoid voltage drop it is recommended that you run no more than 20 feet of ribbon in one run. When longer runs are required homerun each length of ribbon to the driver. This includes all varieties of LED ribbon in both commercial and residential applications. In all commercial applications you must solder all the connections. In areas where the LED Ribbon is on for more than 5 hours continuously, it is recommended that you also solder those connections.

Glimmer Lighting uses the best two-sided tape available, but it is still recommended to use a bead of silicone during installation.

Single Run Example

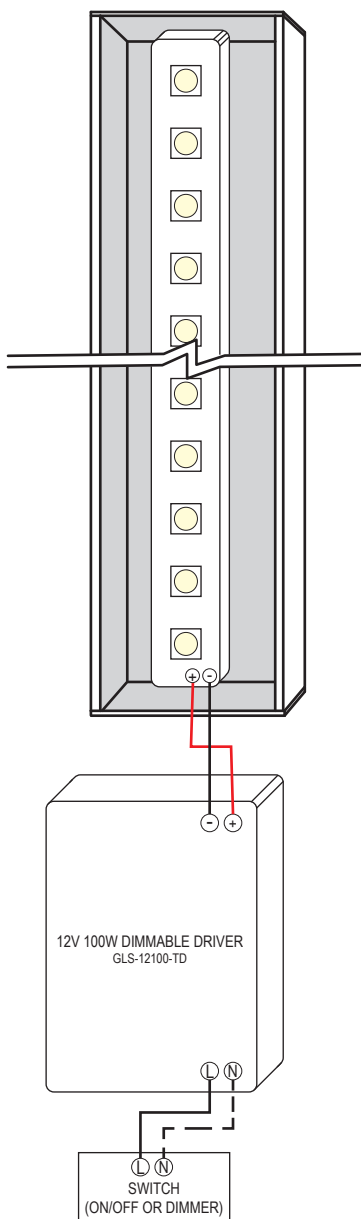

When installing ribbon, drill a hole on the top of the channel at one end of the channel for the power to run from the ribbon to the remotely located driver (up one of the cables when suspended). DO NOT use an octagon box, electrical box not required.

Multi-Run Example

