


Support Rail Type 2936

Top hat profile 35 mm, TS 35 similar to DIN EN 60715, perforated

2936/2 GL

EAN Code: 4013339028504
Smallest packaging unit: 10 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

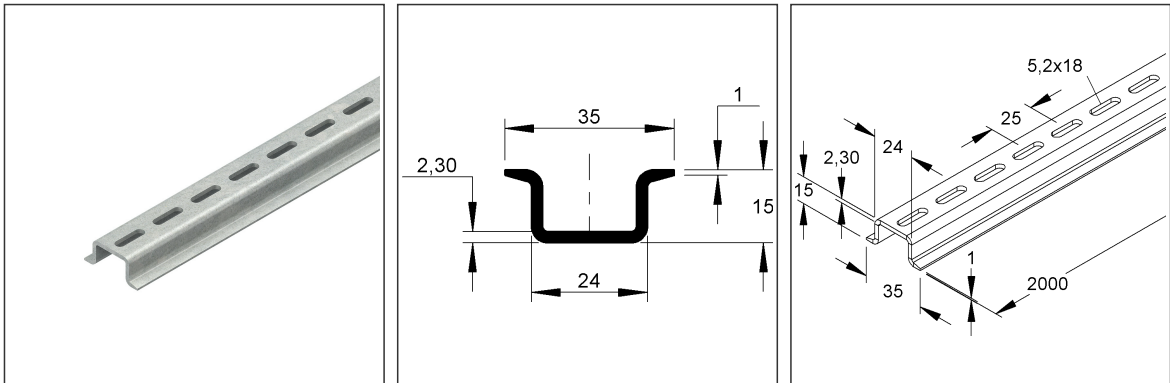

Article Description

Support rail, top hat profile, 35x15x2000 mm, perforated, steel, electro galvanised according to DIN EN ISO 2081, passivated

Weight

Weight per quantity unit	913 g / m
Weight in kg per 100	91 kg / 100m

Physical Article Dimensions

Height	15.00 mm
Width	35.00 mm
Depth/length	2000 mm

Technical Datasheet

Niedax rails

2936/2 GL

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N04
quantity unit	m

Packing Dimension

20 meters = 1 bundle		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU	
Gross weight	18 kg		
Min. quantity	20.00 m	Max. Quantity	20.00 m

Tender Text

Niedax mounting rail model 2936, mounting rail TS 35 Connection dimensions correspond to DIN EN 60715, extra strong design, perforated, electro-galvanised acc. to DIN EN ISO 2081, thick-film passivated, for quick fastening of installation devices and terminal blocks.

Dimensions (approx. dimensions) H x d : 15 x 2,3 mm

Fixing dimensions W : 24 mm

TS Snap-on dimensions B1 : 35 mm

Perforation : 5,2 x 18 mm

Distance between perforations: 25 mm

Delivery length L : 2000 mm

NIEDAX Model-No. : 2936/2 GL

EP Material_____ EP Lohn_____

Unit price/meter

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098