


C-Profile Type 2970

C-profile, slot width 16 mm, acc. to DIN EN 60715, perforated

2970/4 GL

EAN Code: 4013339030200
Smallest packaging unit: 10 x 4 m
quantity unit: m M

the photorealistic images are to be considered as reference images

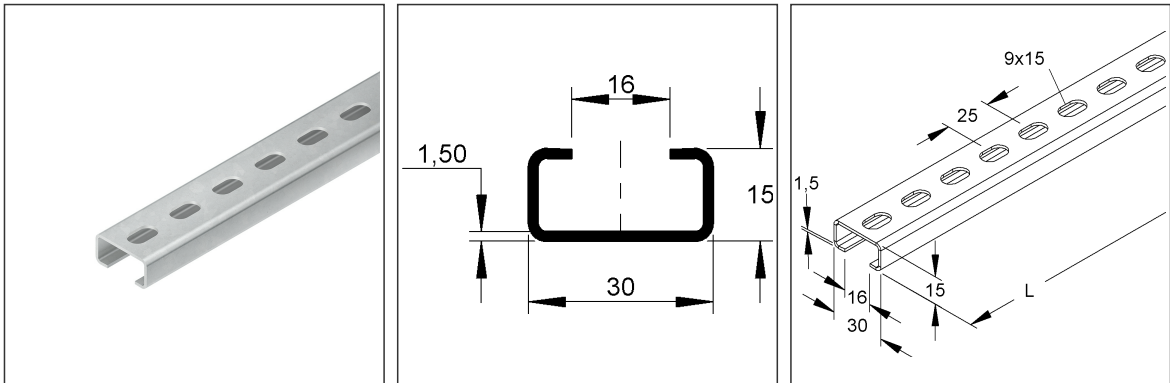

Article Description

C-profile, C-profile, slot width 16 mm, 30x15x4000 mm, perforated, steel, electro galvanised according to DIN EN ISO 2081, passivated

Weight

Weight per quantity unit	700 g / m
Weight in kg per 100	70 kg / 100m

Physical Article Dimensions

Height	15.00 mm
Width	30.00 mm
Depth/length	4000 mm

Technical Datasheet

Niedax rails

2970/4 GL

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N05
quantity unit	m

Packing Dimension

40 meters = 1 bundle		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU	
Gross weight	28 kg		
Min. quantity	40.00 m	Max. Quantity	40.00 m
1200 meters = 1 rack			
Lenght	4000 mm	Width	850 mm
		Height	770 mm
Gross weight	898 kg	Volume	2,618 m³
Min. Quantity	1.200.00 m	Max. Quantity	1.200.00 m

Tender Text

Anchor/C-profile rail model 2970, C-profile acc. to DIN EN 60715, perforated.
Suitable U-clamps (B... and BK...).

Dimensions (approx. dimensions) H x W x D : 15 x 30 x 1.5 mm

slot width : 16 mm

profile perforation : 9 x 15 mm

central distance : 25 mm

delivery length L : 4000 mm

material : steel, electro galvanised acc. to DIN EN ISO 2081, thick-film passivated

NIEDAX model no. : 2970/4 GL

EP material_____ EP wage_____

unit price/meter

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098