

Cable Ladder

rung spacing 300 mm, with continuously perforated side profiles, with riveted, upwardly open rungs made of C-profiles with 11 mm slot width




KL 60.303 E5

EAN Code: 4013339730100

Smallest packaging unit: 6 m

quantity unit: m M

the photorealistic images are to be considered as reference images

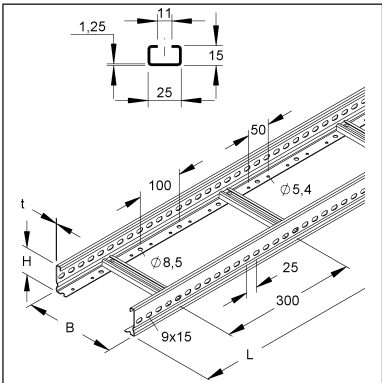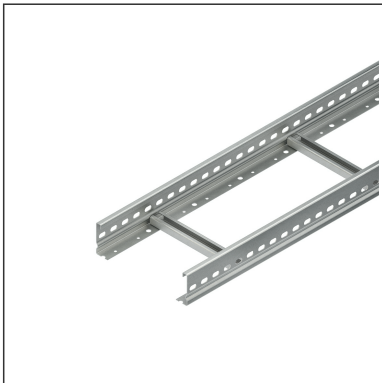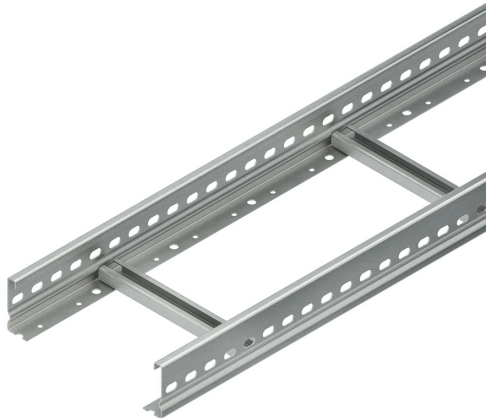

Article Description

Cable ladder, 60x300x6000 mm, t=1,5 mm, perforated, stainless steel, material code: 1.4571

Additional Price Information

|               |     |
|---------------|-----|
| Article group | N13 |
| quantity unit | m   |

Weight

|                          |               |
|--------------------------|---------------|
| Weight per quantity unit | 2,811 kg / m  |
| Weight in kg per 100     | 281 kg / 100m |

# Technical Datasheet

## Cable Ladder System

KL 60.303 E5


the photorealistic images are to be considered as reference images

### Physical Article Dimensions

|              |          |
|--------------|----------|
| Height       | 60.00 mm |
| Width        | 300 mm   |
| Depth/length | 6000 mm  |

### Load Specifications

Load diagram:  $q$  = evenly distributed cable load (tested acc. to DIN EN IEC 61537)

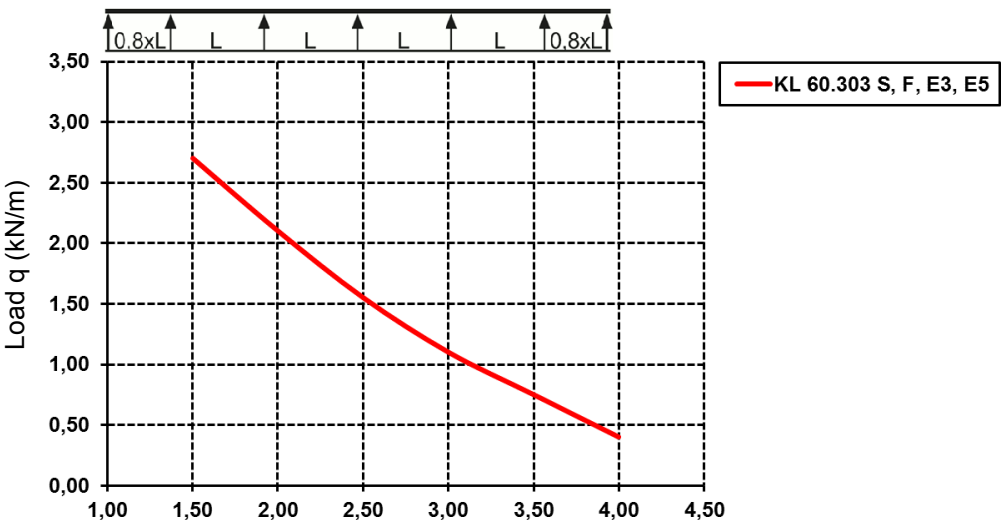

Fixing distance (m)

The load details shown in the diagram are independent of the position of the connectors.

### Packing Dimension

|                           |         |                                     |          |                    |          |
|---------------------------|---------|-------------------------------------|----------|--------------------|----------|
| <b>6 meters = 1 piece</b> |         | ✓ VP1-smallest packaging unit ( PU) |          | ✓ VP1-preferred PU |          |
| Lenght                    | 6000 mm | Width                               | 300 mm   | Height             | 60.00 mm |
| Gross weight              | 17 kg   | Volume                              | 0,108 m³ |                    |          |
| Min. quantity             | 6.00 m  | Max. Quantity                       | 6.00 m   |                    |          |

### Tender Text

Cable ladder acc. to DIN EN 61537, with continuously perforated and profiled side beams, with riveted rungs made of C-profiles with 11 mm slot width.  
Suitable U-clamps (BA...).

Dimensions (approx. dimensions)  
H x W : 60 x 300 mm  
Material thickness beam : 1.5 mm  
Distance between rungs : 300 mm  
Side beam perforation : 9 x 15 mm  
centre distance : 25 mm  
Bottom perforation : Ø 8.5 and Ø 5.4 mm  
centre distance : 100 mm and 50 mm  
Delivery length L : 6000 mm  
Transport length : 6000 mm + W  
Usable cross-section : 12850 mm<sup>2</sup>  
Material : stainless steel, material no. 1.4571, AISI 316Ti  
NIEDAX Model No. : KL 60.303 E5

# Technical Datasheet

## Cable Ladder System

KL 60.303 E5

the photorealistic images are to be considered as reference images

### Tender Text

EP Material\_\_\_\_\_ EP Wage\_\_\_\_\_  
Unit price/meter

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 23.01.2024  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                         |          |
|-------------------------|----------|
| Country of origin       | DE       |
| Federal State of Origin | RP       |
| Customs tariff number   | 73089059 |

### Related items

#### Cover

| Model No.  | Description                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------------------|
| RDV 300 E5 | Cover for cable tray/-ladder, with joint strip, 302x3000 mm, stainless steel, material code: 1.4571, AISI 316Ti |

#### Barrier strip

| Model No. | Description                                                                                                |
|-----------|------------------------------------------------------------------------------------------------------------|
| RW 35 E5  | Barrier strip, 30x3000 mm, t=0,8 mm, stainless steel, material code: 1.4571, AISI 316Ti, incl. accessories |

#### Connector

| Model No. | Description                                                                                                |
|-----------|------------------------------------------------------------------------------------------------------------|
| KSV 60 E5 | Splice plate for cable ladder, height 60 mm, stainless steel, mat. code: 1.4571, washed, incl. accessories |