

# ADC SERIES

## Analog to Digital Converters

The ADC Series Signal Converter connects up to eight 4–20 mA loop-powered analog sensors, or up to eight separately powered 4–20 mA output sensors, or up to four of each. This will produce a digital signal representing 0–100% of each sensor output. It is the perfect solution for photovoltaic power production system monitoring. The ADC converter allows for individually-ranged devices to interface with the industry-standard **Modbus RTU** serial protocol. The device can accept analog signals from current, voltage or temperature sensors, allowing the installer great versatility and higher accuracy. It was designed and built to meet the NK trusted standards of reliability and ease of use.



### Signal Converter Applications

#### Photovoltaic Power Production

- Measure current output accurately using a sensor sized appropriately.
- Measure current from a panel and after the combiner with the same device.
- Measure voltage output, temperature, or any parameter sensor 4–20 mA output.


#### Machine Control

- Combine several analog signals into a single **Modbus** address to enable web viewing of data.

#### SCADA System

- Report and record current, voltage, power, pressure, frequency and flow by using existing sensors but adding network communication easily.

#### Analog Sensor to Digital Network Conversion

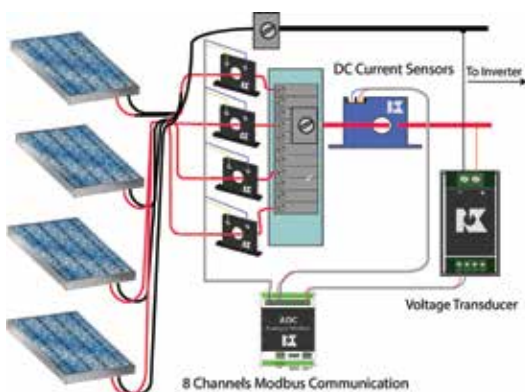

Free program expedites evaluation process. See page 1 for details.

### Signal Converter Features

#### Eight Points of Data

- Convert up to eight 4–20 mA sensor outputs using a single network address.
- Sensor loop power is supplied by the converter: No DC power supply is required.
- Models for 8 loop powered (2-wire) and 8 externally powered (4-wire) or 4 of each type.

#### Fast and Easy Installation

- DIN rail mounted converter with finger-safe terminals clearly marked for field installation speed.

\*For information on the DIN Rail accessories kit, see page 109.

#### Application Versatility

- Convert any standard sensor output to **Modbus RTU** digital network format.

#### Choice of Power Supplies

- ADC converter can be factory set for 120 VAC, 240 VAC or 24 VDC power supplies.

#### Communication Baud Rate Choices


- Field selectable 9600 or 19200 baud rate speeds.

Use any 4–20 mA output sensor as an input to the NK Technologies ADC analog-to-**Modbus** converter: Current, voltage, temperature, or any parameter that the application calls for. With the digital **Modbus** output scaled for zero (4 mA) to 100 percent (20 mA) the signal will represent whatever you may need to measure.


- For additional Application Examples, see page 110 and [www.nktechnologies.com](http://www.nktechnologies.com)

### Signal Converter Dimensions


Side View

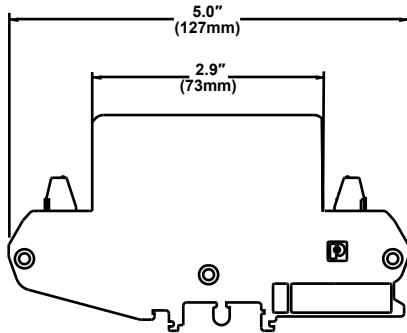

End View

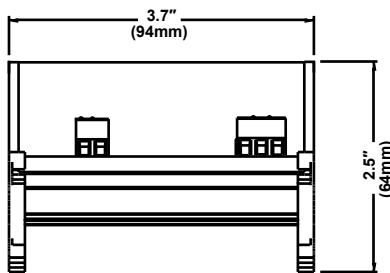

### Signal Converter Connections

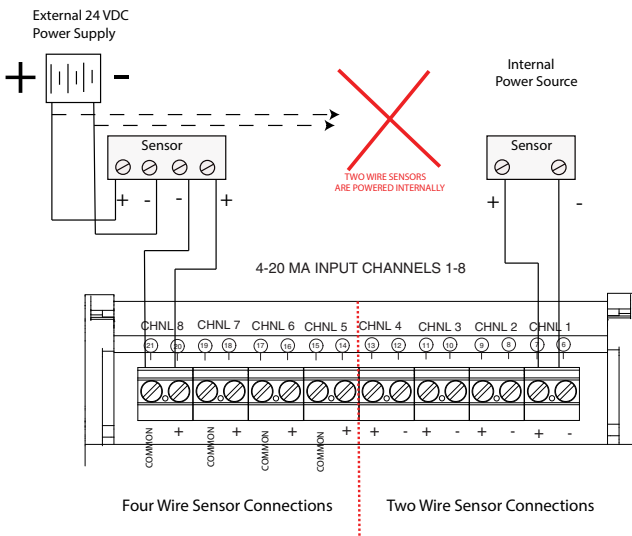

#### Wiring Notes for Installation:

1. Connect sensors to input channel terminals 6–21.
2. Set Modbus network address 1–247.
3. Connect 120 VAC power (240 VAC optional).


### Signal Converter Specifications



Power Supply	24 VDC, 120 VAC 50–60 Hz, 240 VAC optional
Output	Modbus RTU Slave 8 Channels (RS485)
Output Protocol	1 start bit, 8 data bits (LSB first), 1 bit for even parity, 1 stop bit
Output Functions	Function 04, “Read Input Registers”
Input Range(s)	4–20 mA (Power from converter or external)
Accuracy	1.0% FS
Indication	Green Power On LED, Yellow Busy LED, Red Fault LED
Addressing	8 wide binary switch (1 to 247)
Output Range	0–120% (4 mA = 0, 20 mA = 100%)
Dimensions	3.7”H x 5.0”W x 2.0”D (94 mm H x 127 mm W x 51 mm D)
Weight	9.6 oz. (270 grams)
Case	DIN rail mounting, UL94 V0 Flammability Rated
Environmental	-4 to 122°F (-20 to 50°C) 0–95% RH, non-condensing
Listings	UL508 Industrial Control Equipment

### Signal Converter Ordering Information

Sample Model Number: ADC1-420-120-MOD-DIN  
Eight-channel 4–20 mA input converter, 120 VAC powered.



#### (1) Input channels

1	Eight 4–20 mA loop-powered input channels
2	Four loop-powered, four external powered (4-wire)
3	Eight external-powered inputs

#### (2) Sensor Input Type

420	4–20 mA inputs
005	0–5 VDC
010	0–10 VDC as inputs available

#### (3) Power Supply

120	120 VAC
240	240 VAC
24D	24 VDC

#### (4) Output Type

MOD	Modbus RTU
-----	------------

#### (5) Case Style

DIN	DIN rail mounting
-----	-------------------

