


Cable Ladder

made of oval, closed tubular profile bars and welded, downward open, perforated C-profiles

KRC 60.225 F

EAN Code: 4013339846917
Smallest packaging unit:6 m
quantity unit:m M

the photorealistic images are to be considered as reference images

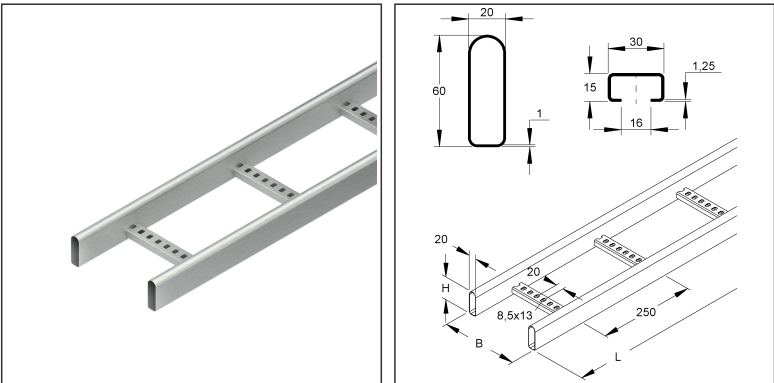

Article Description

Cable ladder, 60x200x6000 mm, with perforated C-profiles, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	2,903 kg / m
Weight in kg per 100	290 kg / 100m

Technical Datasheet

Cable Ladder System

KRC 60.225 F


the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	60.00 mm
Width	200.00 mm
Depth/length	6000 mm

Load Specifications

Load diagram: q = evenly distributed cable load (tested acc. to DIN EN IEC 61537)

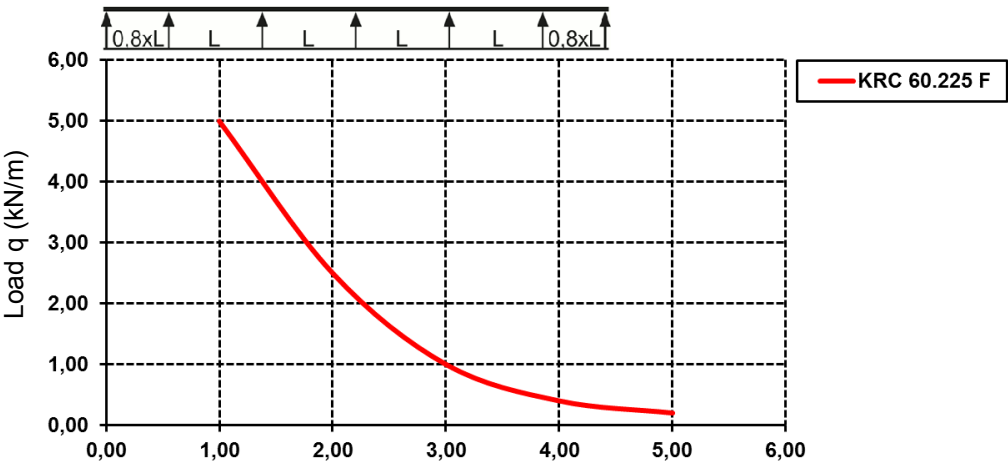

Fixing distance (m)

The load details shown in the diagram are independent of the position of the connectors.

Packing Dimension

6 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	6000 mm	Width	200.00 mm	Height	60.00 mm
Gross weight	17 kg	Volume	0,072 m³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		

Tender Text

Cable ladder, acc. to DIN EN 61537, side beams made of hollow profiles, with downward open welded rungs made of C-profile with 16 mm slot width and continuous perforation.

Dimensions (approx. dimensions) H x W : 60 x 200 mm

Material thickness : 1 mm Rung distance : 250 mm Rung perforation : 8.5 x 13 mm

Delivery length L : 6000 mm

Usable cross-section : 6080 mm²

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : KRC 60.225 F

EP Material _____ EP Wage _____

Unit price/meter

Technical Datasheet

Cable Ladder System

KRC 60.225 F

the photorealistic images are to be considered as reference images

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Cover

Model No.	Description
KRD 200 F	Cover for cable ladder, width 206 mm, steel, hot dip galvanised DIN EN ISO 1461
KRDBK 60 F	Cover fastening clamp, steel, hot dip galvanised DIN EN ISO 1461

Barrier strip

Model No.	Description
KRTB 6 F	Fastening element for barrier strip/ mounting plate, steel, hot dip galvanised DIN EN ISO 1461
RW 35 F	Barrier strip, 30x3000 mm, t=0,75 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Connector

Model No.	Description
KRLV 60 F	Splice plate, steel, hot dip galvanised DIN EN ISO 1461