


Cable Ladder

made of oval, closed tubular profile bars and welded, downward open, perforated C-profiles

KRC 60.125 F

EAN Code: 4013339846900
Smallest packaging unit: 6 m
quantity unit: 6 6

the photorealistic images are to be considered as reference images

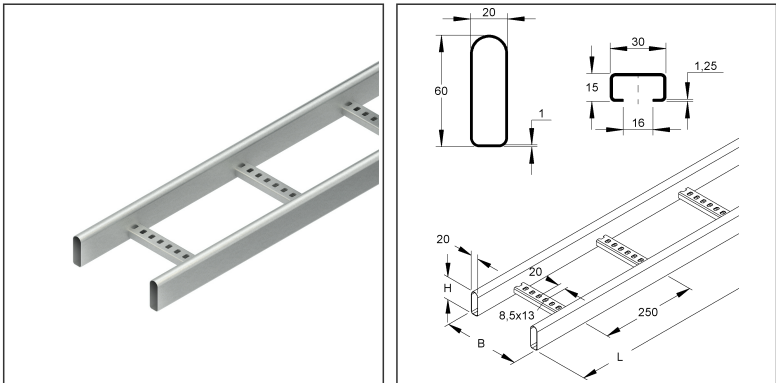

Article Description

Cable ladder, 60x100x6000 mm, with perforated C-profiles, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	6

Weight

Weight per quantity unit	2,643 kg / 6
Weight in kg per 100	264 kg / 1006

Technical Datasheet

Cable Ladder System

KRC 60.125 F


the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	60.00 mm
Width	100.00 mm
Depth/length	6000 mm

Load Specifications

Load diagram: q = evenly distributed cable load (tested acc. to DIN EN IEC 61537)

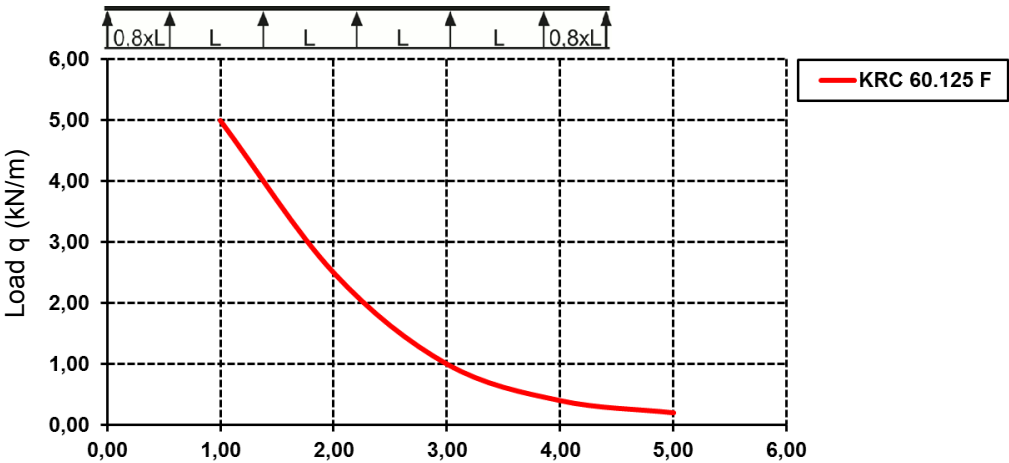

The load details shown in the diagram are independent of the position of the connectors.

Packing Dimension

6 meters = 1 piece		✓ VP1-smallest packaging unit (PU)	✓ VP1-preferred PU		
Lenght	6000 mm	Width	100.00 mm	Height	60.00 mm
Gross weight	16 kg	Volume	0,036 m³		
Min. quantity	6,00 6	Max. Quantity	6,00 6		

Tender Text

Cable ladder, acc. to DIN EN 61537, side beams made of hollow profiles, with downward open welded rungs made of C-profile with 16 mm slot width and continuous perforation.

Dimensions (approx. dimensions) H x W : 60 x 100 mm

Material thickness : 1 mm Rung distance : 250 mm Rung perforation : 8.5 x 13 mm

Delivery length L : 6000 mm

Usable cross-section : 2280 mm²

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : KRC 60.125 F

EP Material _____ EP Wage _____

Unit price/meter

Technical Datasheet

Cable Ladder System

KRC 60.125 F

the photorealistic images are to be considered as reference images

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Cover

Model No.	Description
KRD 100 F	Cover for cable ladder, width 106 mm, steel, hot dip galvanised DIN EN ISO 1461
KRDBK 60 F	Cover fastening clamp, steel, hot dip galvanised DIN EN ISO 1461

Barrier strip

Model No.	Description
KRTB 6 F	Fastening element for barrier strip/ mounting plate, steel, hot dip galvanised DIN EN ISO 1461
RW 35 F	Barrier strip, 30x3000 mm, t=0,75 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Connector

Model No.	Description
KRLV 60 F	Splice plate, steel, hot dip galvanised DIN EN ISO 1461