

LPCHTKQCB3-01



* White color housing by default. Black color housing can be supplied upon request.


Key Features

- Dimmable control applications (DALI-2 or 0/1-10V)
- 8 luminaire outlets + 1 extra sensor outlet for sensor connection
- Luminaire outlet: Wieland 6-pole terminal base (L' or L, N, E, Em, Dim+, Dim-)
- Sensor outlet: Wieland 8-pole terminal base (L, N, E, L', P1, P2, Dim-, Dim+)
- Black housing and white housing available to choose from
- Freely switch between 1-channel (1 x 8) & 2-channel (2 x 4) control
- Tamper-proof structure design
- Expandable: easy extension to another LPCHTKQCB3-01 via plug' n' play
- Rating of system: Max 16A. Rating of each output: Max 10A
- Flame-retardant material for safety protection

Your Benefits

- Five types of installation methods meets different project needs
- Reduce labour hours and labour cost significantly
- Simple and intuitive wiring connections
- Improved safety level during wiring operations
- Clear and clean wiring makes it easy for future maintenance
- Can be supplied with pre-wired cables

Dimensions (mm)

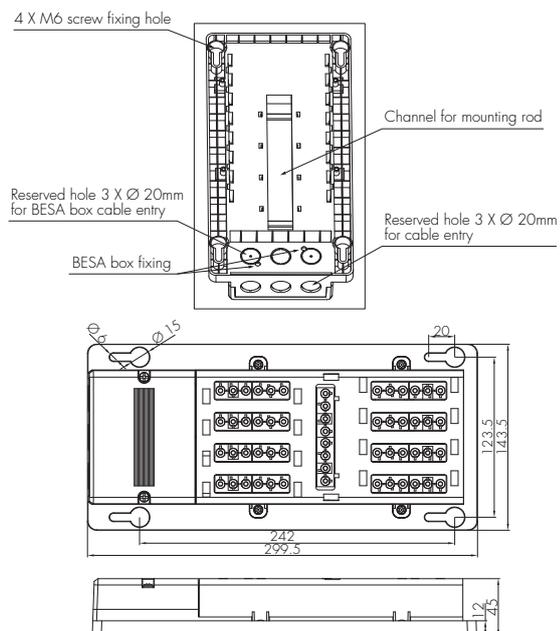

LUCECO
LIGHTING
HYTRONIK®


CE emc S CB IP20

Ordering data


Model name: LPCHTKQCB3-01

Description: Wieland 6-pole terminal base quick connection box for dimming application, with DALI or 0/1-10V output, 8 luminaire outlets and 1 sensor outlet. Freely switch between 1-channel and 2-channel control. Rating of system 16A, rating of each output 10A.

Input & Output Terminal Function

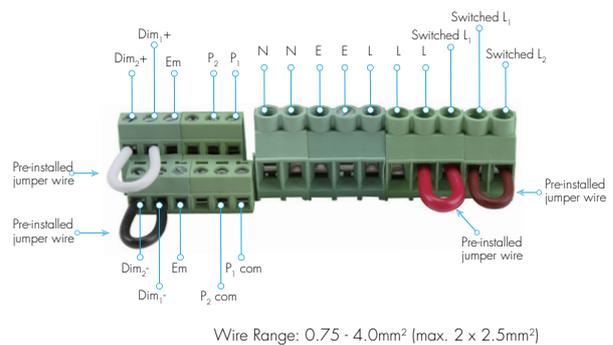


When using DALI dimming




When using on/off switching or 0/1-10V dimming

Luminaire outlet

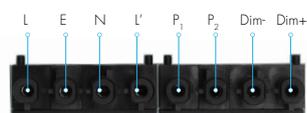

Sensor outlet

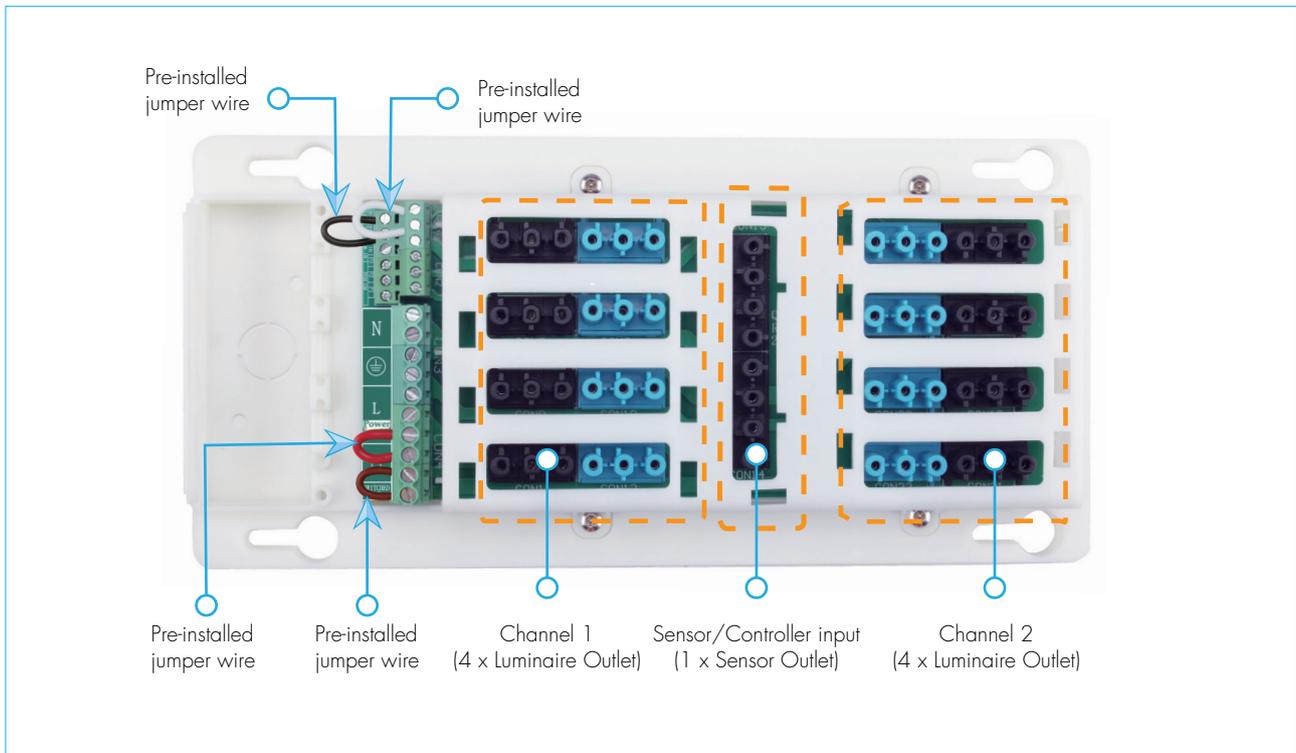

Factory default for LPCHTKQCB3-01 comes with four pre-installed jumper wires. The brown wire short-connects Switched L1 and Switched L2 together, the red jumper wire short-connects Switched L and L, the black jumper wire short-connects Dim₁- and Dim₂-, and the white jumper wire short-connects Dim₁+ and Dim₂+. With these jumper wires, user can freely choose different dimming control method and also freely switch between one-channel and two-channel control.


- 1) one-channel (1 x 8) DALI dimming --- keep all four jumper wires.
- 2) two-channel (2 x 4) dual DALI dimming --- keep red wire & brown wire, remove black wire & white wire.
In this case the two channels will be controlled separately (channel 1 is controlled by Dim₁+ & Dim₁-, and channel 2 is controlled by Dim₂- & Dim₂+).
- 3) one-channel (1 x 8) 0/1-10V dimming --- remove red wire, keep brown wire & black wire & white wire.
- 4) two-channel (2 x 4) dual 0/1-10V dimming --- remove all four jumper wires.
In this case the two channels will be controlled separately (channel 1 is controlled by Switched L1, Dim₁+ & Dim₁-, and channel 2 is controlled by Switched L2, Dim₂- & Dim₂+).
- 5) two-channel (2 x 4) DALI dimming + on/off switching --- keep red wire, remove brown wire & black wire & white wire.
In this case the two channels will be controlled separately (channel 1 is controlled by Dim₁+ & Dim₁-, and channel 2 is controlled by Switched L2).
- 6) two-channel (2 x 4) 0/1-10V dimming + on/off switching --- remove all four jumper wires.
In this case the two channels will be controlled separately (channel 1 is controlled by Dim₁+ & Dim₁-, and channel 2 is controlled by Switched L2).

This flexible design aims to reduce model inventories for users, and just one box is capable enough to handle different dimming requirements on the project site. Easy for management, and powerful for usage!

Installation methods


Surface Mount ▼

It can work with 4 x M6 screws to fix onto both walls and ceilings.

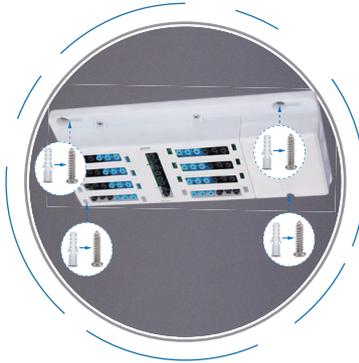


BESA/Junction Box Connection ▼

It can be connected with BESA/junction box.

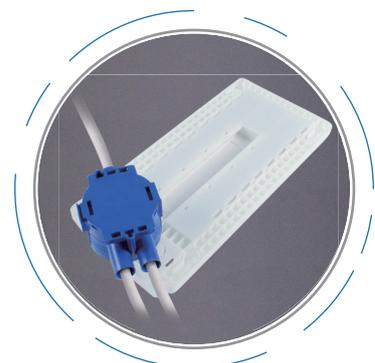

Channel Nut Mount ▼

It can work with channel nuts to fasten into the back.

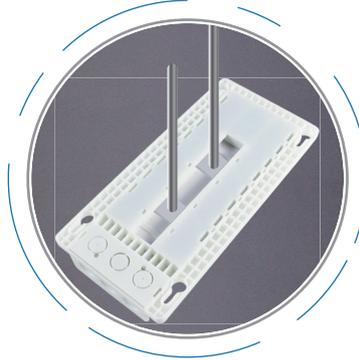


Mounting Rods ▼

It can be fixed with mounting rods.




Marco Tray Mount ▼

It can work with Marco clips steel wire cables tray system.

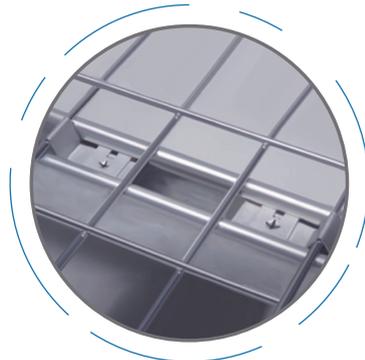

Wiring Diagram

Factory default setting with four pre-installed jumper wires
One-channel (1x8) DALI dimming control

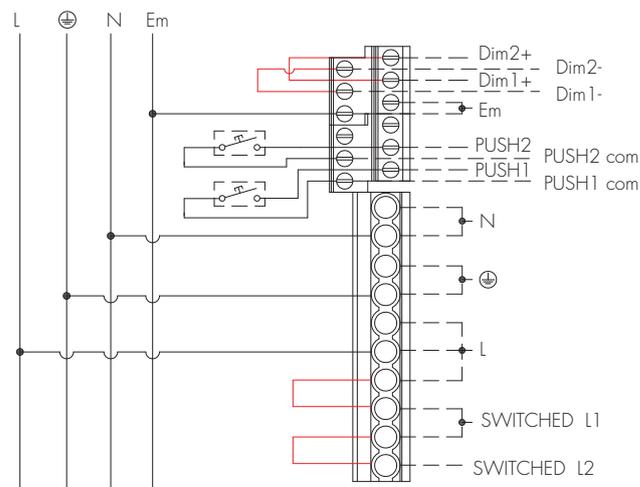


jumper wires

Note: 1. By removing different jumper wires, users can achieve different dimming/switching control. For more details, please reference page 63.

2. Do not wire across phases.


Wiring & Emergency Test

Local lighting switch and local emergency test switch

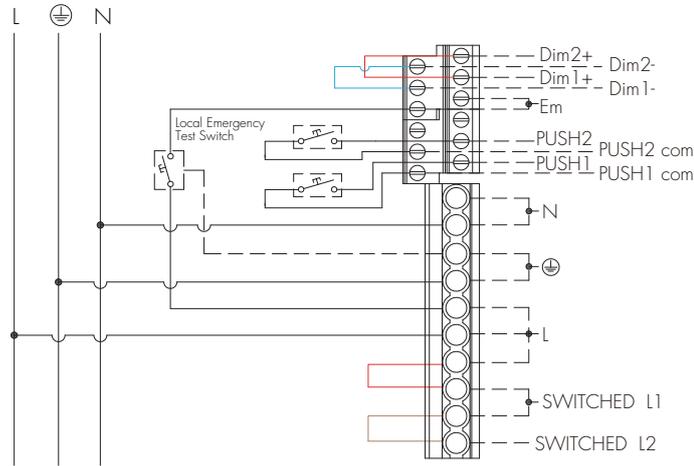


Note: Do not wire across phases.

Using local lighting switch for power interruption

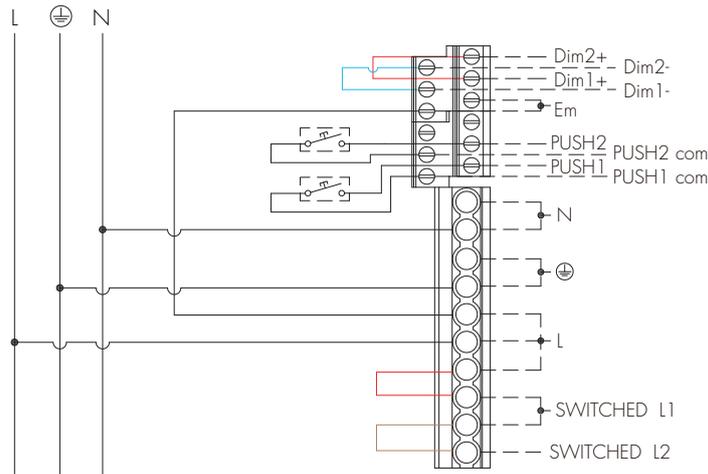

Note: 1. A local lighting switch may still be used when there is a central emergency test switch or when a circuit breaker is used to interrupt the power.
2. Do not wire across phases.

Emergency test using central switch

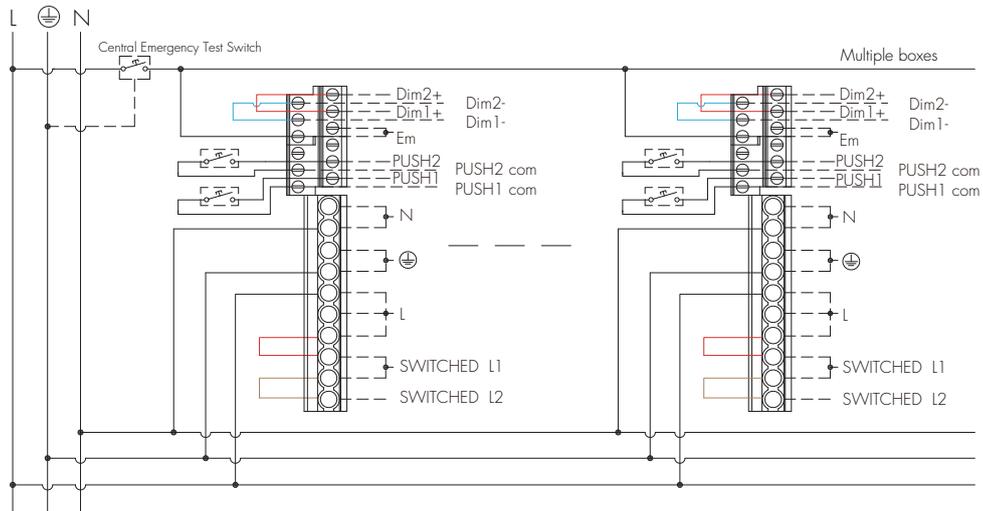

Note: 1. A local lighting switch may still be used when there is a central emergency test switch.
2. Do not wire across phases.