



Cable Ladder

made of oval, closed tubular profile bars and welded, closed, oval rungs

KRO 60.425 F

EAN Code: 4013339846993  
Smallest packaging unit: 6 m  
quantity unit: m M

the photorealistic images are to be considered as reference images

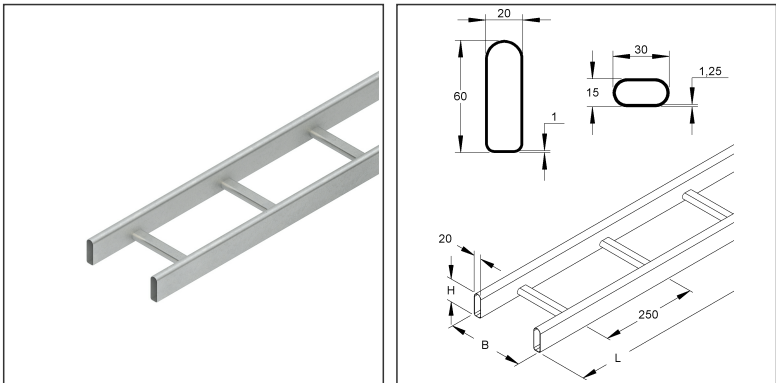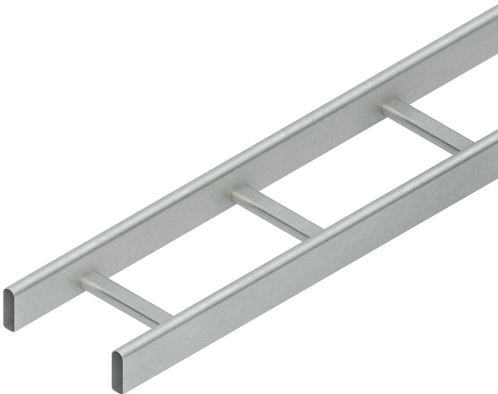

Article Description

Cable ladder, 60x400x6000 mm, with closed, oval rungs, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

|               |     |
|---------------|-----|
| Article group | N13 |
| quantity unit | m   |

Weight

|                          |               |
|--------------------------|---------------|
| Weight per quantity unit | 3,619 kg / m  |
| Weight in kg per 100     | 362 kg / 100m |

Physical Article Dimensions

|              |          |
|--------------|----------|
| Height       | 60.00 mm |
| Width        | 400 mm   |
| Depth/length | 6000 mm  |

# Technical Datasheet


## Cable Ladder System

KRO 60.425 F

the photorealistic images are to be considered as reference images

### Load Specifications

Load diagram:  $q$  = evenly distributed cable load (tested acc. to DIN EN IEC 61537)

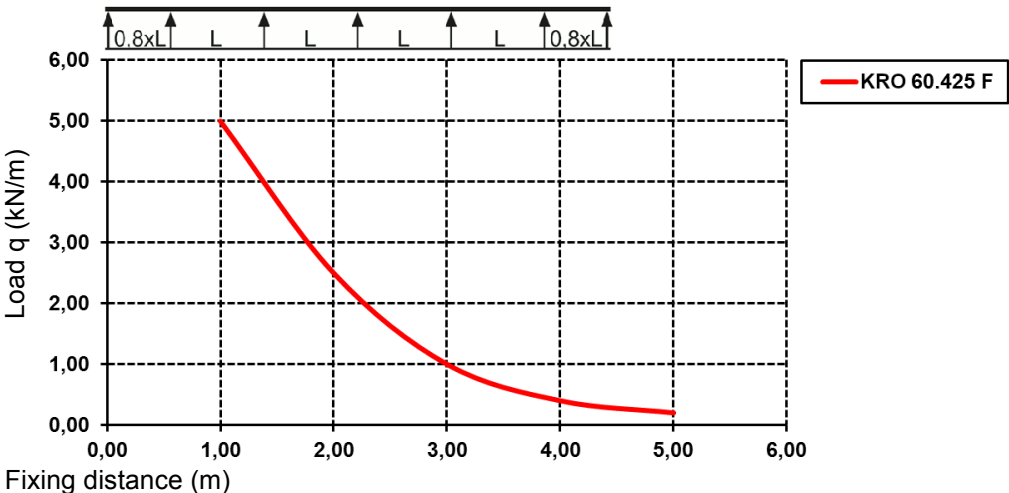

### Packing Dimension

|                           |         |                                     |                    |        |          |
|---------------------------|---------|-------------------------------------|--------------------|--------|----------|
| <b>6 meters = 1 piece</b> |         | ✓ VP1-smallest packaging unit ( PU) | ✓ VP1-preferred PU |        |          |
| Lenght                    | 6000 mm | Width                               | 400 mm             | Height | 60.00 mm |
| Gross weight              | 22 kg   | Volume                              | 0,144 m³           |        |          |
| Min. quantity             | 6.00 m  | Max. Quantity                       | 6.00 m             |        |          |

### Tender Text

Cable ladder, acc. to DIN EN 61537, side beams made of hollow profiles, with welded-on, closed, oval rungs.  
Dimensions (approx. dimensions) H x W : 60 x 400 mm  
Material thickness : 1 mm Rung  
distance : 250 mm  
Delivery length L : 6000 mm  
Usable cross-section : 13680 mm<sup>2</sup>  
Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461  
NIEDAX Model No. : KRO 60.425 F  
EP Material \_\_\_\_\_ EP Wage \_\_\_\_\_  
Unit price/meter

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 23.01.2024  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                         |          |
|-------------------------|----------|
| Country of origin       | DE       |
| Federal State of Origin | RP       |
| Customs tariff number   | 73089059 |

# Technical Datasheet

## Cable Ladder System

KRO 60.425 F

the photorealistic images are to be considered as reference images

### Related items

#### Cover

| Model No.  | Description                                                                     |
|------------|---------------------------------------------------------------------------------|
| KRD 400 F  | Cover for cable ladder, width 406 mm, steel, hot dip galvanised DIN EN ISO 1461 |
| KRDBK 60 F | Cover fastening clamp, steel, hot dip galvanised DIN EN ISO 1461                |

#### Barrier strip

| Model No. | Description                                                                                        |
|-----------|----------------------------------------------------------------------------------------------------|
| KRTB 6 F  | Fastening element for barrier strip/ mounting plate, steel, hot dip galvanised DIN EN ISO 1461     |
| RW 35 F   | Barrier strip, 30x3000 mm, t=0,75 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories |

#### Connector

| Model No. | Description                                             |
|-----------|---------------------------------------------------------|
| KRLV 60 F | Splice plate, steel, hot dip galvanised DIN EN ISO 1461 |