


Mounting Rail Type 2933

Top hat profile 35 mm, TS 35 acc. to DIN EN 60715, unperforated

2933/2 GO

EAN Code: 4013339023301
Smallest packaging unit: 20 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

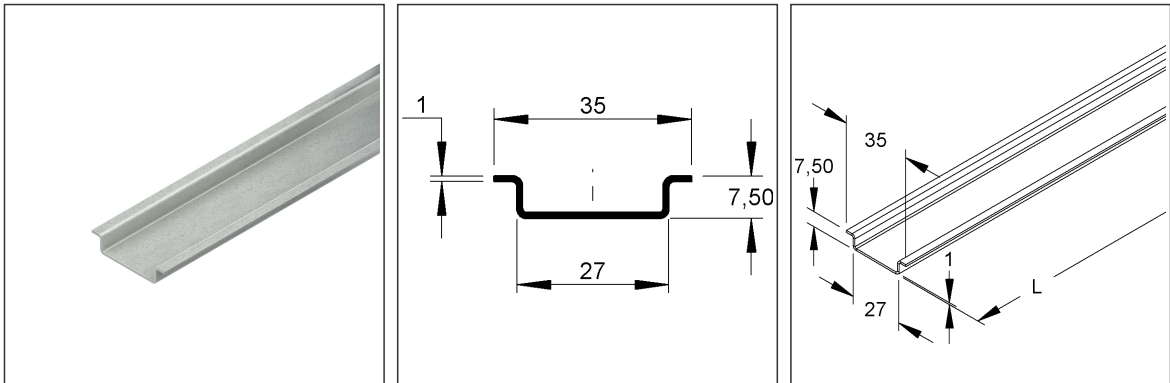

Article Description

Support rail, top hat profile, 35x7,5x2000 mm, unperforated, steel, electro galvanised according to DIN EN ISO 2081, passivated

Weight

Weight per quantity unit	360 g / m
Weight in kg per 100	36 kg / 100m

Physical Article Dimensions

Height	7.50 mm
Width	35.00 mm
Depth/length	2000 mm

Technical Datasheet

Niedax rails

2933/2 GO

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N04
quantity unit	m

Packing Dimension

40 meters = 1 bundle		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU	
Gross weight	14 kg		
Min. quantity	40.00 m	Max. Quantity	40.00 m
2880 meters = 1 rack			
Lenght	2000 mm	Width	850 mm
		Height	770 mm
Gross weight	1093 kg	Volume	1,309 m³
Min. Quantity	2.880.00 m	Max. Quantity	2.880.00 m

Tender Text

Niedax support rail model 2933, support rail TS 35 acc. to DIN EN 60715, unperforated, electro galvanised acc. to DIN EN ISO 2081, thick-film passivated, for quick fastening of installation devices and terminal blocks. Dimensions (approx. dimensions) H x d : 7.5 x 1 mm Fastening dimension W : 27 mm TS Snap-on dimension B1 : 35 mm Delivery length L : 2000 mm NIEDAX Model No.: 2933/2 GO EP Material_____ EP Wage_____ Unit price/meter	
---	--

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098