



Mounting Rail Type 2934

Top hat profile 35 mm, TS 35 similar to DIN EN 60715, perforated

2934/2 GL

EAN Code: 4013339026807
Smallest packaging unit: 10 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

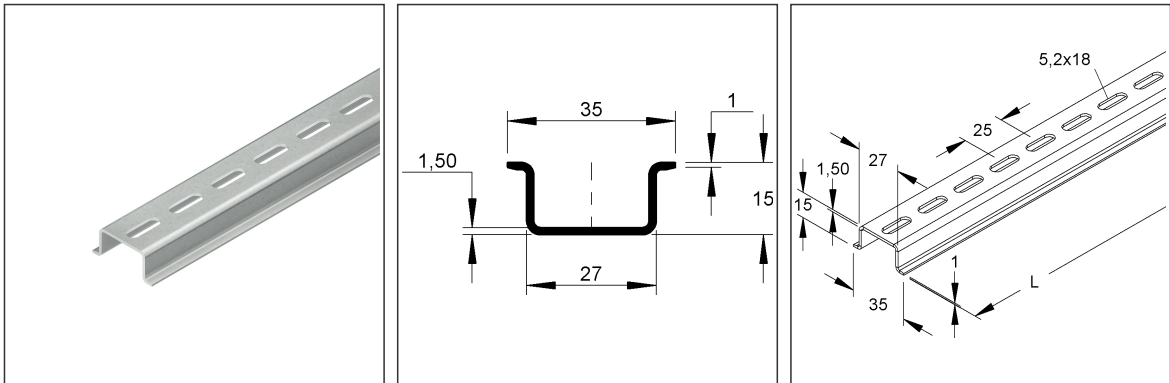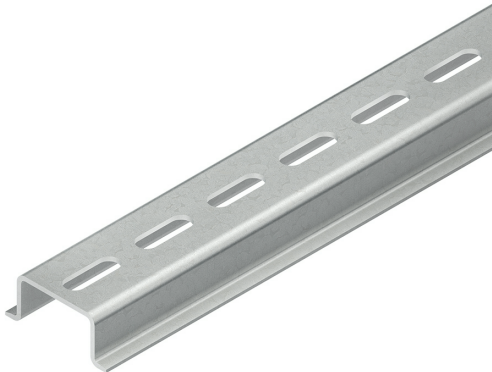

Article Description

Support rail, top hat profile, 35x15x2000 mm, perforated, steel, electro galvanised according to DIN EN ISO 2081, passivated

Weight

Weight per quantity unit	640 g / m
Weight in kg per 100	64 kg / 100m

Physical Article Dimensions

Height	15.00 mm
Width	35.00 mm
Depth/length	2000 mm

Technical Datasheet

Niedax rails

2934/2 GL

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N04
quantity unit	m

Packing Dimension

20 meters = 1 bundle		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU	
Gross weight	13 kg		
Min. quantity	20.00 m	Max. Quantity	20.00 m
1920 meters = 1 rack			
Lenght	2000 mm	Width	850 mm
		Height	770 mm
Gross weight	1288 kg	Volume	1,309 m³
Min. Quantity	1.920.00 m	Max. Quantity	1.920.00 m

Tender Text

Niedax mounting rail model 2934, mounting rail TS 35 connection dimensions acc. to DIN EN 60715, higher and thicker version, perforated, electrogalvanised acc. to DIN EN ISO 2081, thick-film passivated, for quick fastening of installation devices and terminal blocks.

Dimensions (approx. dimensions) H x d : 15 x 1.5 mm

Fastening dimension W : 27 mm

TS Snap-on dimension B1 : 35 mm

Perforation : 5.2 x 18 mm

Distance between perforations: 25 mm

Delivery length L : 2000 mm

NIEDAX Model No. : 2934/2 GL

EP Material_____ EP Wage_____

Unit price/meter

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098