



Mounting Rail Type 2934

Top hat profile 35 mm, TS 35 similar to DIN EN 60715, perforated

2934/2 SL

EAN Code: 4013339027804
Smallest packaging unit: 10 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

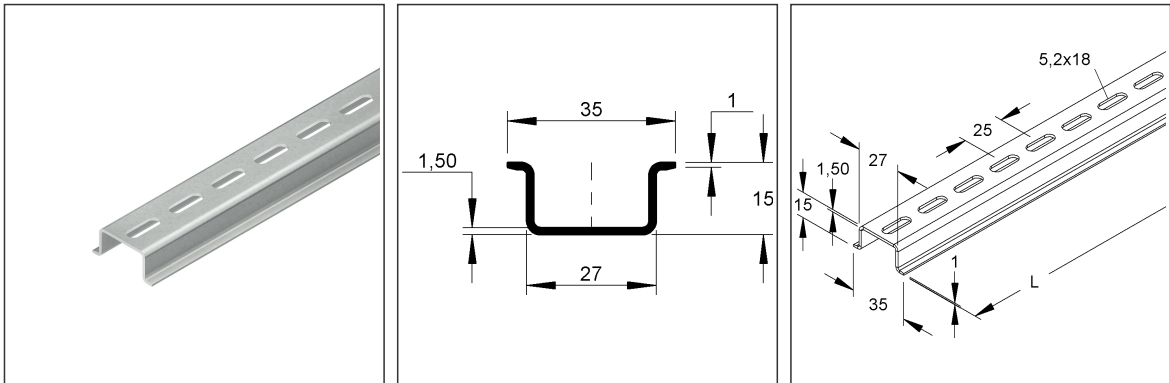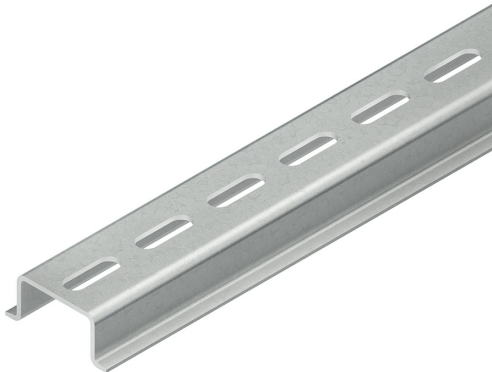

Article Description

Support rail, top hat profile, 35x15x2000 mm, perforated, steel, pre-galvanised according to DIN EN 10346

Weight

Weight per quantity unit	640 g / m
Weight in kg per 100	64 kg / 100m

Physical Article Dimensions

Height	15.00 mm
Width	35.00 mm
Depth/length	2000 mm

Additional Price Information

Article group	N04
quantity unit	m

Technical Datasheet

Niedax rails

2934/2 SL

the photorealistic images are to be considered as reference images

Packing Dimension

20 meters = 1 bundle		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Gross weight	13 kg				
Min. quantity	20.00 m	Max. Quantity	20.00 m		
2080 meters = 1 rack					
Lenght	2000 mm	Width	850 mm	Height	770 mm
Gross weight	1390 kg	Volume	1,309 m³		
Min. Quantity	2.080.00 m	Max. Quantity	2.080.00 m		

Tender Text

Niedax mounting rail model 2934, mounting rail TS 35 connection dimensions acc. to DIN EN 60715, higher and thicker version, perforated, pre-galvanised acc. to DIN EN 10346, for quick fastening of installation devices and terminal blocks. Dimensions (approx. dimensions) H x d : 15 x 1,5 mm Fastening dimension W : 27 mm TS Snap-on dimension B1 : 35 mm Hole : 5,2 x 18 mm Distance between holes: 25 mm Delivery length L : 2000 mm NIEDAX Model No. : 2934/2 SL EP Material_____ EP Wage_____ Unit price/meter	
---	--

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098