


Mounting Rail Type 2935

Top hat profile 35 mm, TS 35 acc. to DIN EN 60715, perforated

2935/2 GL

EAN Code: 4013339025602
Smallest packaging unit: 20 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

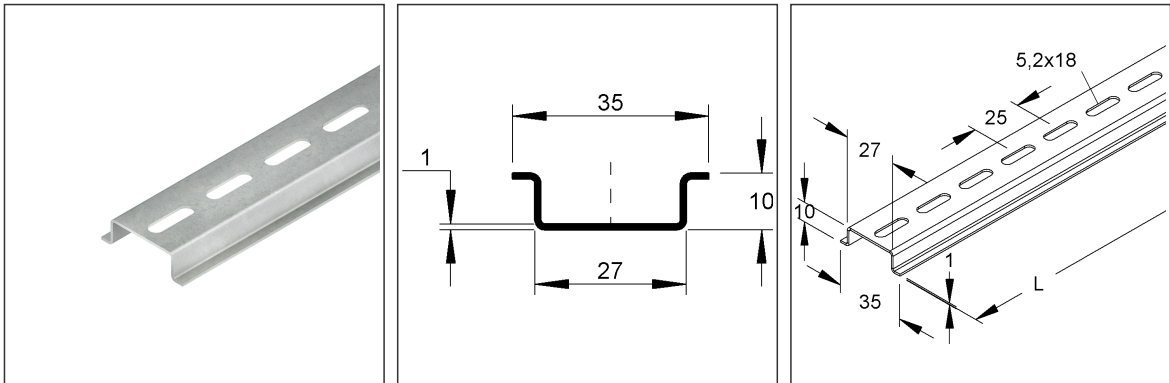

Article Description

Support rail, top hat profile, 35x10x2000 mm, perforated, steel, electro galvanised according to DIN EN ISO 2081, passivated

Weight

Weight per quantity unit	371 g / m
Weight in kg per 100	37 kg / 100m

Physical Article Dimensions

Height	10.00 mm
Width	35.00 mm
Depth/length	2000 mm

Technical Datasheet

Niedax rails

2935/2 GL

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N04
quantity unit	m

Packing Dimension

40 meters = 1 bundle		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU	
Gross weight	15 kg		
Min. quantity	40.00 m	Max. Quantity	40.00 m

Tender Text

Niedax support rail model 2935, support rail TS 35 Connection dimensions correspond to DIN EN 60715, 10 mm high version, perforated, galvanised acc. to DIN EN ISO 2081, thick-film passivated, for quick fastening of installation devices and terminal blocks.

Dimensions (approx. dimensions) H x d : 10 x 1 mm

Fastening dimension B : 27 mm

TS Snap-on dimension B1 : 35 mm

Perforation : 5.2 x 18 mm

Distance d. perforation: 25 mm

Delivery length L : 2000 mm

NIEDAX Model No. : 2935/2 GL

EP Material_____ EP Wage_____

Unit price/meter

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098