



Mounting Rail Type 2937

Top hat profile 15 mm, TS 15 acc. to DIN EN 60715, unperforated

2937/2 GO

EAN Code: 4013339022403
Smallest packaging unit: 20 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

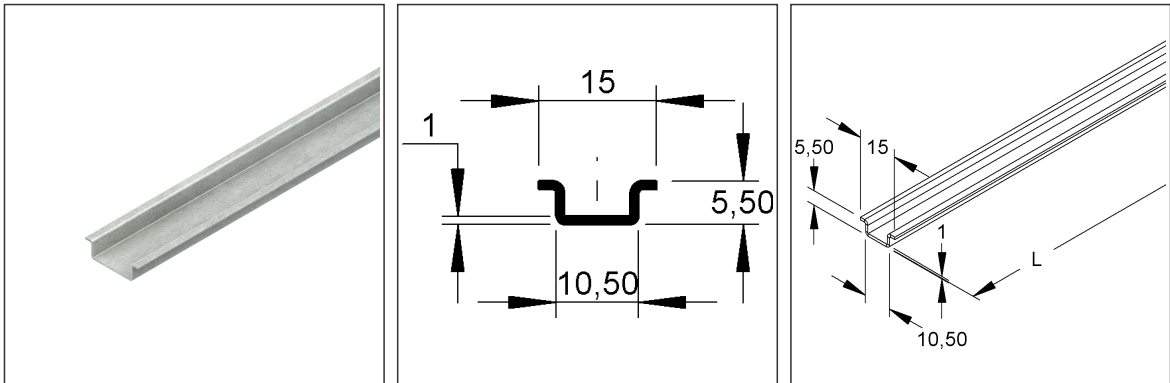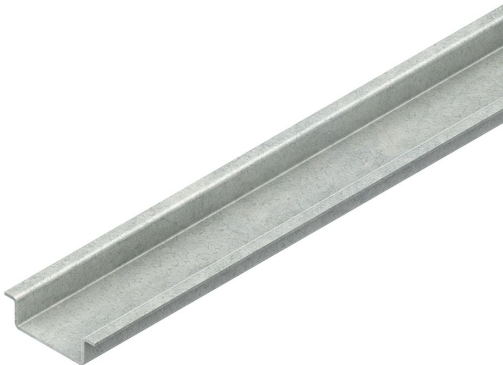

Article Description

Support rail, top hat profile, 15x5,5x2000 mm, unperforated, steel, electro galvanised according to DIN EN ISO 2081, passivated

Weight

Weight per quantity unit	177 g / m
Weight in kg per 100	18 kg / 100m

Physical Article Dimensions

Height	5.50 mm
Width	15.00 mm
Depth/length	2000 mm

Technical Datasheet

Niedax rails

2937/2 GO

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N04
quantity unit	m

Packing Dimension

40 meters = 1 bundle		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU	
Gross weight	7,08 kg		
Min. quantity	40.00 m	Max. Quantity	40.00 m

Tender Text

Mounting profile model 2937, top hat profile, mounting profile TS 15 to DIN EN 60715, unperforated, for terminal blocks.
Dimensions (approx. dimensions) H x W x d : 5,5 x 10,5 x 1 mm
TS snap-on dimensions B1 : 15 mm
delivery length L : 2000 mm
material : steel, electro-galvanised acc. to DIN EN ISO 2081, thick-film passivated
NIEDAX model no. : 2937/2 GO
EP material_____ EP wage_____
unit price/meter

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098