


C-Profile Type 2970

C-profile, slot width 16 mm, acc. to DIN EN 60715, perforated

2970/2 GL

EAN Code: 4013339030101
Smallest packaging unit: 10 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

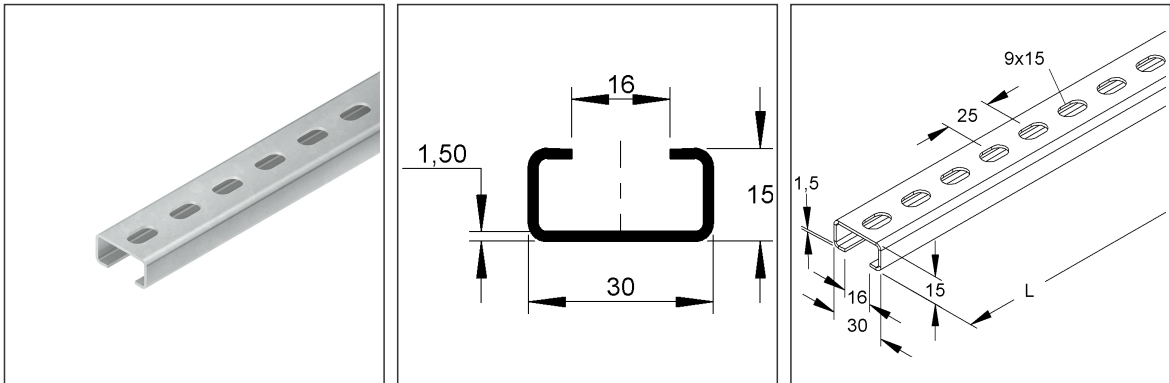

Article Description

C-profile, C-profile, slot width 16 mm, 30x15x2000 mm, perforated, steel, electro galvanised according to DIN EN ISO 2081, passivated

Weight

Weight per quantity unit	700 g / m
Weight in kg per 100	70 kg / 100m

Physical Article Dimensions

Height	15.00 mm
Width	30.00 mm
Depth/length	2000 mm

Technical Datasheet

Niedax rails

2970/2 GL

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N05
quantity unit	m

Packing Dimension

20 meters = 1 bundle		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU	
Gross weight	14 kg		
Min. quantity	20.00 m	Max. Quantity	20.00 m
800 meters = 1 rack			
Lenght	2000 mm	Width	850 mm
		Height	770 mm
Gross weight	618 kg	Volume	1,309 m³
Min. Quantity	800.00 m	Max. Quantity	800.00 m

Tender Text

Anchor/C-profile rail model 2970, C-profile acc. to DIN EN 60715, perforated.
Suitable U-clamps (B... and BK...).

Dimensions (approx. dimensions) H x W x D : 15 x 30 x 1.5 mm

Slot width : 16 mm

Profile perforation : 9 x 15 mm

central distance : 25 mm

Delivery length L : 2000 mm

Material : steel, electro galvanised acc. to DIN EN ISO 2081, thick-film passivated

NIEDAX model no. : 2970/2 GL

EP material_____ EP wage_____

Unit price/meter

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098