


C-Profile Type 2970

C-profile, slot width 16 mm, acc. to DIN EN 60715, perforated

2970/2 SL

EAN Code: 4013339030309
Smallest packaging unit: 10 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

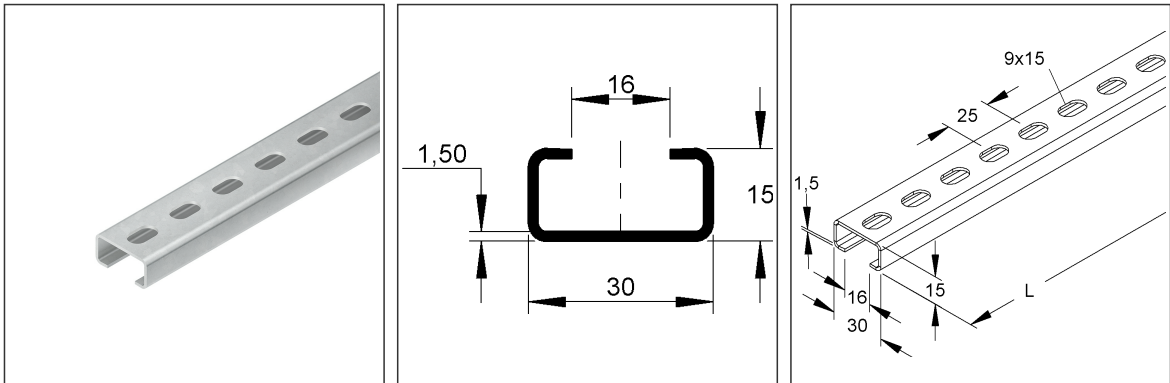

Article Description

C-profile, C-profile, slot width 16 mm, 30x15x2000 mm, perforated, steel, pre-galvanised according to DIN EN 10346

Weight

Weight per quantity unit	700 g / m
Weight in kg per 100	70 kg / 100m

Physical Article Dimensions

Height	15.00 mm
Width	30.00 mm
Depth/length	2000 mm

Technical Datasheet

Niedax rails

2970/2 SL

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N05
quantity unit	m

Packing Dimension

20 meters = 1 bundle ✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU

Gross weight 14 kg

Min. quantity 20.00 m Max. Quantity 20.00 m

1600 meters = 1 rack

Lenght 2000 mm Width 850 mm Height 770 mm

Gross weight 1178 kg Volume 1,309 m³

Min. Quantity 1.600.00 m Max. Quantity 1.600.00 m

Tender Text

Anchor/C-profile rail Model 2970, C-profile to DIN EN 60715, perforated. Suitable U-clamps (B... and BK...).

Please observe additional regulations for use in functional maintenance!

The fastening of the anchor/C-profile rail with the building ground as well as the fastening distances are to be taken from the valid test certificate!

Dimensions (approx. dimensions)

H x W x d : 15 x 30 x 1.5 mm

Slot width : 16 mm

Profile perforation : 9 x 15 mm

central distance : 25 mm

Delivery length L : 2000 mm

Material : Steel, pre-galvanised to DIN EN 10346

NIEDAX Model No. : 2970/2 SL

EP Material_____ EP Wage_____

Unit price/meter

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098