


C-Profile Type 2980

C-profile, slot width 16 mm, unperforated

2980/2 FO

EAN Code: 4013339042104
Smallest packaging unit: 10 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

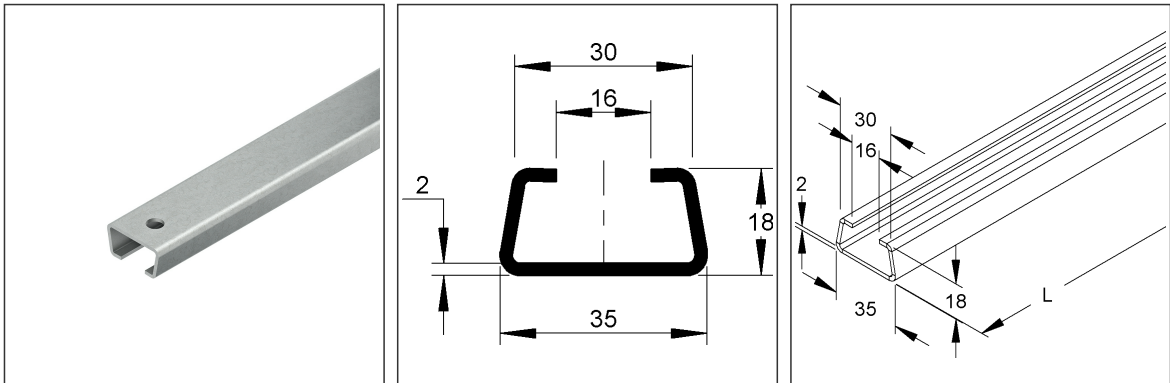

Article Description

C-profile, C-profile, slot width 16 mm, 35x18x2000 mm, unperforated, steel, hot dip galvanised DIN EN ISO 1461

Weight

Weight per quantity unit	1,284 kg / m
Weight in kg per 100	128 kg / 100m

Physical Article Dimensions

Height	18.00 mm
Width	35.00 mm
Depth/length	2000 mm

Technical Datasheet

Niedax rails

2980/2 FO

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N05
quantity unit	m

Packing Dimension

20 meters = 1 bundle		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU	
Gross weight	26 kg		
Min. quantity	20.00 m	Max. Quantity	20.00 m
800 meters = 1 rack			
Lenght	2000 mm	Width	850 mm
		Height	770 mm
Gross weight	1086 kg	Volume	1,309 m³
Min. Quantity	800.00 m	Max. Quantity	800.00 m

Tender Text

Anchor/C-profile rail model 2980, C-profile with sloping sides, unperforated but with central immersion holes on both sides to the profile ends. Suitable U-clamps (B... and BK...).	
Dimensions (approx. dimensions) H x d : 18 x 2 mm	
W on B1 : 35 on 30 mm	
Slot width : 16 mm Immersion perforation : Ø 9 mm	
Distance to profile end : 15 mm	
Delivery length L : 2000 mm	
Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461	
NIEDAX Model No. : 2980/2 FO	
EP Material_____ EP Wage_____	
Unit price/meter	

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098