


C-Profile Type 2980

C-profile, slot width 16 mm, unperforated

2980/6 FO

EAN Code: 4013339042302
Smallest packaging unit: 6 x 6 m
quantity unit: m M

the photorealistic images are to be considered as reference images

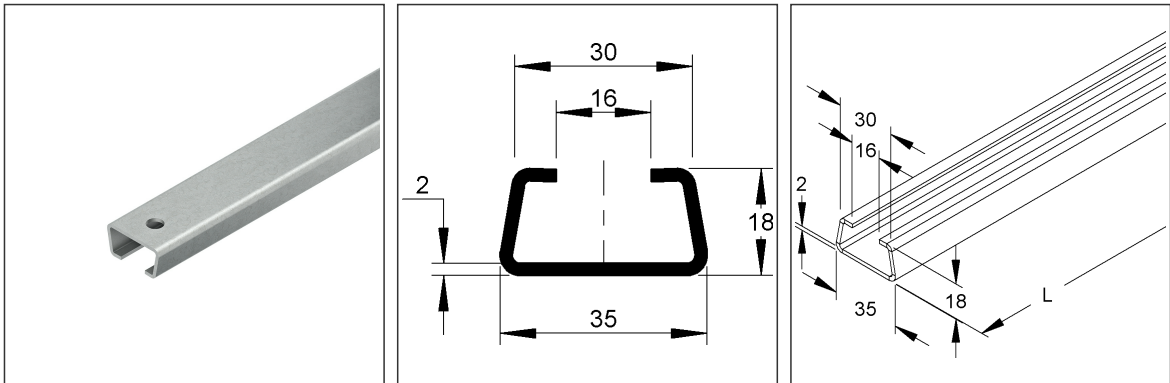

Article Description

C-profile, C-profile, slot width 16 mm, 35x18x6000 mm, unperforated, steel, hot dip galvanised DIN EN ISO 1461

Weight

Weight per quantity unit	1,285 kg / m
Weight in kg per 100	128 kg / 100m

Physical Article Dimensions

Height	18.00 mm
Width	35.00 mm
Depth/length	6000 mm

Technical Datasheet

Niedax rails

2980/6 FO

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N05
quantity unit	m

Packing Dimension

36 meters = 1 bundle		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU	
Gross weight	46 kg		
Min. quantity	36.00 m	Max. Quantity	36.00 m

Tender Text

Anchor/C-profile rail model 2980, C-profile with sloping sides, unperforated.
Suitable U-clamps (B... and BK...).

Dimensions (approx. dimensions) H x d : 18 x 2 mm

B on B1 : 35 on 30 mm

Slot width : 16 mm

Delivery length L : 6000 mm

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : 2980/6 FO

EP Material_____ EP Wage_____

Unit price/meter

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098