


C-Profile Type 2986

C-profile, slot width 18 mm, to DIN EN 60715, with special perforation

2986/4 GL9

EAN Code: 4013339032105
Smallest packaging unit: 5 x 4 m
quantity unit: m M

the photorealistic images are to be considered as reference images

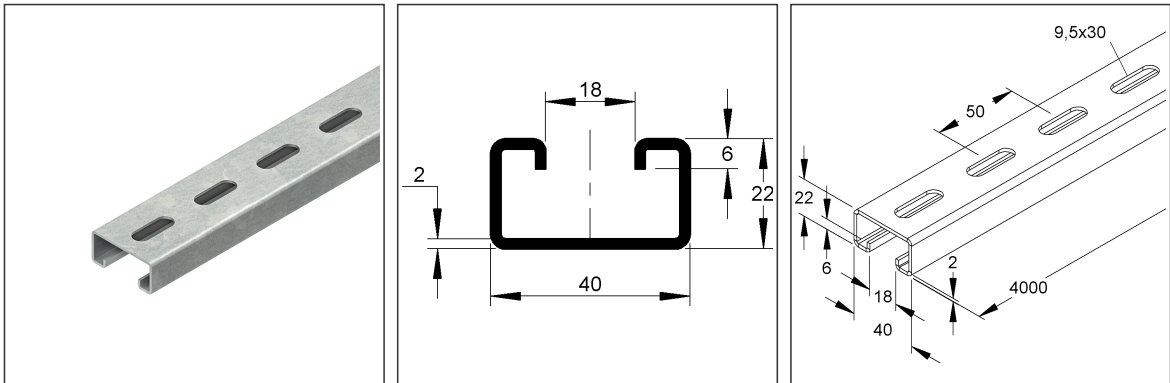

Article Description

C-profile, C-profile, slot width 18 mm, 40x22x4000 mm, perfo. 9x15 mm, steel, electro galvanised according to DIN EN ISO 2081, passivated

Weight

Weight per quantity unit	1,507 kg / m
Weight in kg per 100	151 kg / 100m

Physical Article Dimensions

Height	22.00 mm
Width	40.00 mm
Depth/length	4000 mm

Technical Datasheet

Niedax rails

2986/4 GL9

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N05
quantity unit	m

Packing Dimension

20 meters = 1 bundle		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU	
Gross weight	30 kg		
Min. quantity	20.00 m	Max. Quantity	20.00 m

Tender Text

Anchor/profile rail model 2986, C-profile acc. to DIN EN 60715, with special perforation.
Suitable U-clamps (BU... and BUK...).

The protective cap SKC 86 must be fitted in personal hazard areas. To ensure that the protective cap can be fitted without problems, a distance of at least 30 mm from the end of the profile must be maintained.

Dimensions (approx. dimensions)
H x W x D : 22 x 40 x 2 mm
Slot width : 18 mm
Profile perforation : 9.5 x 30 mm
central distance : 50 mm
Delivery length L : 4000 mm
Material : Steel, electro galvanised acc. to DIN EN ISO 2081, thick-film passivated
NIEDAX Model No. : 2986/4 GL9
EP Material_____ EP Wage_____
Unit price/meter

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098