


Device Built-In Trunking, bottom Part

single pass symmetrical, with 2 mounting profiles, with bottom perforation

BU651058.6

EAN Code: 4011126050363

the photorealistic images are to be considered as reference images

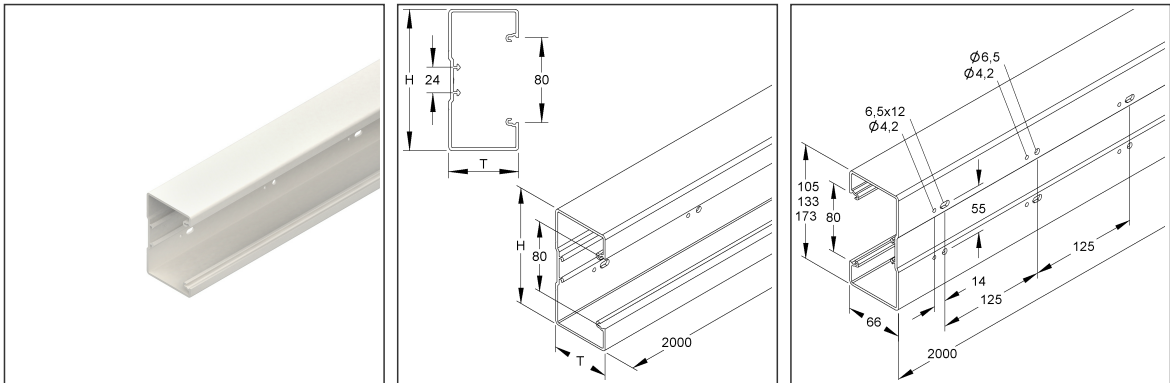

Article Description

Device built-in trunking, with bottom perforation, 105x66x2000 mm, plastics PVC-hard, RAL 9001, cream white

Incl. accessories

1 x KUV

Additional Price Information

Article group	K633
---------------	------

Weight

Weight per quantity unit	1,143 kg
Weight in kg per 100	114 kg

Technical Datasheet

Device trunking from PVC

BU651058.6

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	105.00 mm
Width	66.00 mm
Depth/length	2000 mm

Packing Dimension

2 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	2000 mm	Width	66.00 mm	Height	105.00 mm
Gross weight	2,28 kg	Volume	0,014 m³		
Max. Quantity	2	Min. quantity	2		

8 meters = 1		✓ VP2-preferred PU			
Lenght	2010 mm	Width	125.00 mm	Height	140.00 mm
Gross weight	9,99 kg	Volume	0,035 m³		
Min. Quantity	8.00	Max. Quantity	8.00		

288 meters = 1 rack					
Lenght	2090 mm	Width	1055 mm	Height	1090 mm
Gross weight	440 kg	Volume	2,403 m³		
Min. Quantity	288.00	Max. Quantity	288.00		

Tender Text

Device trunking base, single-flight, symmetrical, with two continuous mounting profiles in the back section for attaching max. two partitions and continuous perforation in the trunking back. two barrier walls and continuous perforation in the trunking back, including one trunking coupling KUV per 2 m delivery length, please order joint connector BSV65 separately for exact connection of the trunking bases, device mounting in the cable run with snap-in device box for installation programmes with 80 mm cover frame, device installation without perforated panels, the visible surfaces are protected with a protective film, internal device trunking top part BO80. ... must be ordered separately.

VDE certified!

Dimensions (approx. dimensions) H x D : 105 x 66 mm

Cover opening : 80 mm

Delivery length L : 2000 mm

Usable cross-section : 6546 mm²

Material : PVC-hard (polyvinyl chloride)

Colour : cream white

RAL : 9001 (similar)

Kleinhuis Model no. : BU651058.6

EP Material_____ EP Wage_____

Unit price/meters

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Device trunking from PVC

BU651058.6

the photorealistic images are to be considered as reference images

Origin & International Trade

Country of origin	DE
Customs tariff number	39259020

Related items

Cover

Model No.	Description
BO80.6	Device built-in trunking, upper part, 80x2000 mm, plastics PVC-hard, RAL 9001, cream white
BSVO80.6	Joint cover, cover opening 81 mm, plastics ASA, RAL 9001, cream white
DH55	Lifter for cover, rubber, RAL 9005, black

Barrier strip

Model No.	Description
BTR/W65	Plug on angle, 28x45 mm, plastics PVC-hard, colour grey
BTR65	Barrier wall, 49x2000 mm, Kunststoff PVC-hard

Connector

Model No.	Description
BSV65	Splice plate, depth 66 mm, for height 105 mm and 133 mm, stainless steel, material code: 1.4310