


Device Built-In Trunking, bottom Part

single pass symmetrical, with 2 mounting profiles, with bottom perforation

BU651708.6

EAN Code: 4011126365450

the photorealistic images are to be considered as reference images

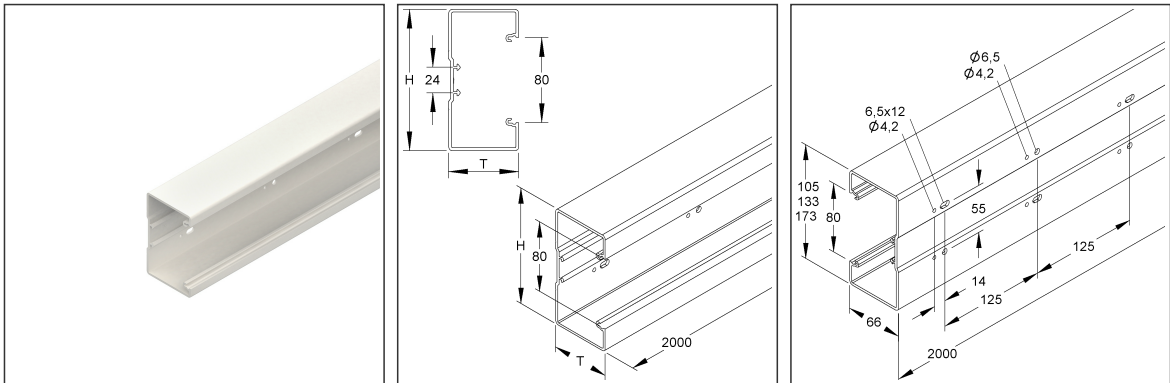

Article Description

Device built-in trunking, with bottom perforation, 173x66x2000 mm, plastics PVC-hard, RAL 9001, cream white

Incl. accessories

1 x KUV

Additional Price Information

Article group	K633
---------------	------

Weight

Weight per quantity unit	1,771 kg
Weight in kg per 100	177 kg

Technical Datasheet

Device trunking from PVC

BU651708.6

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	173.00 mm
Width	66.00 mm
Depth/length	2000 mm

Packing Dimension

2 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	2000 mm	Width	66.00 mm	Height	173.00 mm
Gross weight	3,54 kg	Volume	0,023 m³		
Max. Quantity	2	Min. quantity	2		

8 meters = 1		✓ VP2-preferred PU			
Lenght	2010 mm	Width	230 mm	Height	165.00 mm
Gross weight	15 kg	Volume	0,076 m³		
Min. Quantity	8.00	Max. Quantity	8.00		

120 meters = 1 rack					
Lenght	2090 mm	Width	1055 mm	Height	1090 mm
Gross weight	306 kg	Volume	2,403 m³		
Min. Quantity	120.00	Max. Quantity	120.00		

Tender Text

Device trunking base, single-flight, symmetrical, with two continuous mounting profiles in the back section for attaching max. two partitions and continuous perforation in the trunking back. two barrier walls and continuous perforation in the trunking back, including one trunking coupling KUV per 2 m delivery length, please order joint connectors BSV65/170 separately for exact connection of the trunking bases, device mounting in the cable run with snap-in device box for installation programmes with 80 mm cover frame, device installation without perforated panels, the visible surfaces are protected with a protective film, internal device trunking top part BO80. ... must be ordered separately.

VDE certified!

Dimensions (approx. dimensions) H x D : 173 x 66 mm

Cover opening : 80 mm

Delivery length L : 2000 mm

Usable cross-section : 11034 mm²

Material : PVC-hard (polyvinyl chloride)

Colour : cream white

RAL : 9001 (similar)

Kleinhuis Model no. : BU651708.6

EP Material_____ EP Wage_____

Unit price/meters

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Device trunking from PVC

BU651708.6

the photorealistic images are to be considered as reference images

Origin & International Trade

Country of origin	DE
Customs tariff number	39259020

Related items

Cover

Model No.	Description
BO80.6	Device built-in trunking, upper part, 80x2000 mm, plastics PVC-hard, RAL 9001, cream white
BSVO80.6	Joint cover, cover opening 81 mm, plastics ASA, RAL 9001, cream white
DH55	Lifter for cover, rubber, RAL 9005, black

Barrier strip

Model No.	Description
BTR/W65	Plug on angle, 28x45 mm, plastics PVC-hard, colour grey
BTR65	Barrier wall, 49x2000 mm, Kunststoff PVC-hart

Connector

Model No.	Description
BSV65/170	Splice plate, depth 66 mm, for height 173 mm, Edelstahl, Werkstoff-Nr.: 1.4310