


Cable Protection Duct

with bottom perforation, with cover, with fixed barrier wall

HKL2052.6

EAN Code: 4011126361612

the photorealistic images are to be considered as reference images

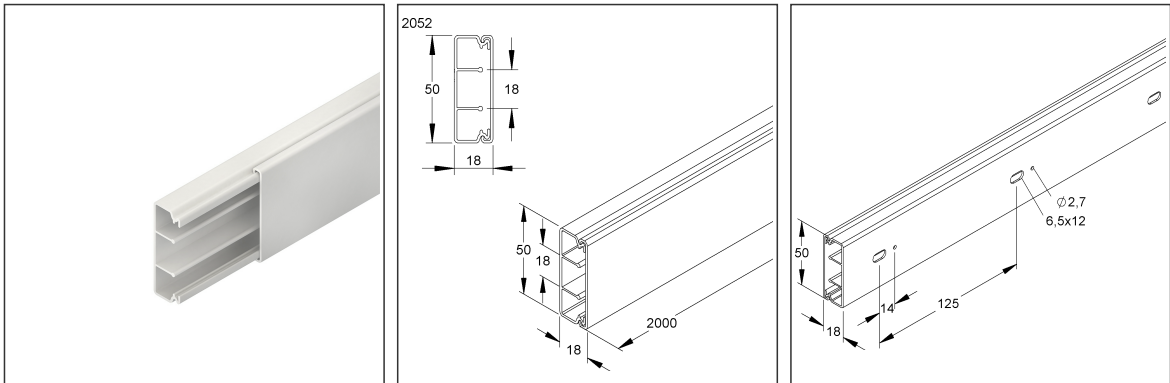

Article Description

HKL-cable protection duct, with bottom perforation, 18x50x2000 mm, Kunststoff PVC-hart, RAL 9001, cremeweiß

Additional Price Information

Article group	K640
---------------	------

Weight

Weight per quantity unit	322 g
Weight in kg per 100	32 kg

Physical Article Dimensions

Height	50.00 mm
Width	18.00 mm
Depth/length	2000 mm

Technical Datasheet

Cable routing duct

HKL2052.6

the photorealistic images are to be considered as reference images

Packing Dimension

2 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	2000 mm	Width	18.00 mm	Height	50.00 mm
Gross weight	0,64 kg	Volume	0,002 m³		
Min. quantity	2	Max. Quantity	2		
48 meters = 1		✓ VP2-preferred PU			
Lenght	2010 mm	Width	155.00 mm	Height	150.00 mm
Gross weight	16 kg	Volume	0,047 m³		
Min. Quantity	48.00	Max. Quantity	48.00		
1200 meters = 1 rack					
Lenght	2090 mm	Width	1055 mm	Height	1090 mm
Gross weight	490 kg	Volume	2,403 m³		
Min. Quantity	1.200.00	Max. Quantity	1.200.00		

Tender Text

Electrical installation trunking, with cover and single-row fixing holes in the base, with 2 fixed barrier walls, halogen-containing.
VDE certified!
Dimensions (approx. dimensions) H x W : 18 x 50 mm
single row bottom hole : 6.5 x 12 mm and Ø 2.7 mm
Bottom hole spacing grid dimension : 125 mm
Delivery length L : 2000 mm
Usable cross-section : 450 mm²
Material : PVC-hard (polyvinyl chloride)
Colour : cream white
RAL : 9001 (similar)
Kleinhuis Model No. : HKL2052.6
EP Material_____ EP Wage_____
Unit price/metre

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	39259020

Related items