


Cable Protection Duct

with perforated bottom, incl. cover without barrier wall

HKL2540.6

EAN Code: 4011126351422

the photorealistic images are to be considered as reference images

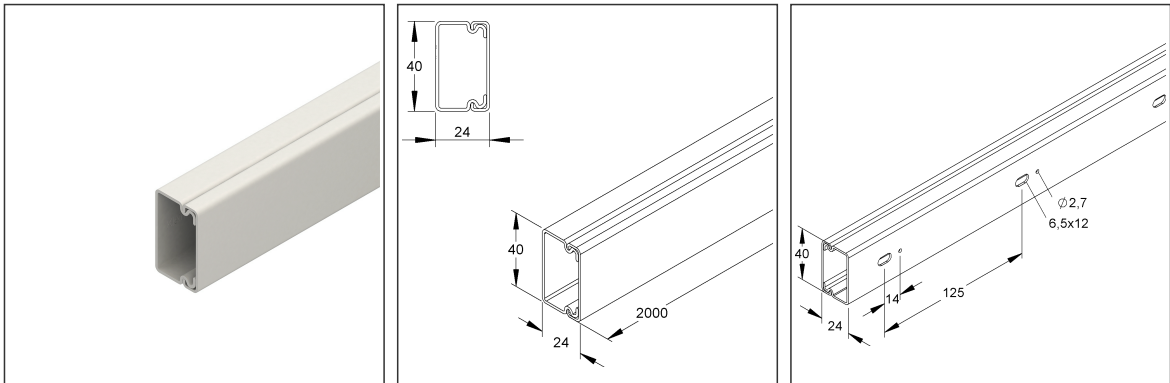

Article Description

HKL-cable protection duct, with bottom perforation, 24x40x2000 mm, Kunststoff PVC-hart, RAL 9001, cremeweiß

Additional Price Information

Article group	K640
---------------	------

Weight

Weight per quantity unit	296 g
Weight in kg per 100	30 kg

Physical Article Dimensions

Height	40.00 mm
Width	24.00 mm
Depth/length	2000 mm

Technical Datasheet

Cable routing duct

HKL2540.6

the photorealistic images are to be considered as reference images

Packing Dimension

2 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	2000 mm	Width	24.00 mm	Height	40.00 mm
Gross weight	0,59 kg	Volume	0,002 m³		
Min. quantity	2	Max. Quantity	2		
30 meters = 1		✓ VP2-preferred PU			
Lenght	2010 mm	Width	130.00 mm	Height	125.00 mm
Gross weight	9,71 kg	Volume	0,033 m³		
Min. Quantity	30.00	Max. Quantity	30.00		
1080 meters = 1 rack					
Lenght	2090 mm	Width	1055 mm	Height	1090 mm
Gross weight	430 kg	Volume	2,403 m³		
Min. Quantity	1.080.00	Max. Quantity	1.080.00		

Tender Text

Electrical installation trunking, with cover and single-row fixing holes in the base, without barrier wall, halogen-containing. Please order retaining clips 638/3040 separately.
VDE certified!
Dimensions (approx. dimensions) H x W : 24 x 40 mm
single row bottom perforation : 6.5 x 12 mm and Ø 2.7 mm
Bottom hole spacing grid spacing : 125 mm
Delivery length L : 2000 mm
Usable cross-section : 463 mm²
Material : PVC-hard (polyvinyl chloride)
Colour : cream white
RAL : 9001 (similar)
Kleinhuis Model No. : HKL2540.6
EP Material_____ EP Wage_____
Unit price/metre

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	39259020

Related items