


Al-Cu connector - DIN 46267

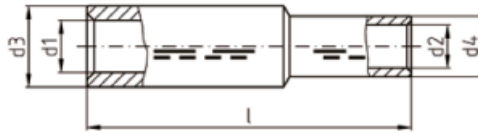

Al 99,5%
Cu-ETP DIN 13601

filled with contact grease / closed
with oil stop
for Al conductors according to DIN EN 60228 and Al
ropes according to DIN EN 50182

DIN 46267 p. 1, 2

mm ²			Art. N.	Reference	mm					kg (/100)	kg (/100) Cu	Pack
Al RC/S*	Al C**	Cu RC/S*			d1	d3	d2	d4	l			
25	35	10	ICALCU2510V	Al 12 / CU 6	6,8	12	4,4	6	51	0,99	0,23	10
		16	ICALCU2516V	Al 12 / CU 8			5,5	8,5	61	1,61	0,84	10
		25	ICALCU2525V	Al 12 / CU 10			7	10	62	1,91	1,13	10
35	50	16	ICALCU3516V	Al 14 / CU 8	8	14	5,5	8,5	71	2,12	0,89	10
		25	ICALCU3525V	Al 14 / CU 10			7	10	71	2,41	1,13	10
		35	ICALCU3535V	Al 14 / CU 12			8,2	12,2	70	2,98	1,71	10
50	70	16	ICALCU5016V	Al 16 / CU 8	9,8	16	5,5	8,5	71,5	2,48	0,90	10
		25	ICALCU5025V	Al 16 / CU 10			7	10	71,5	2,66	1,03	10
		35	ICALCU5035V	Al 16 / CU 12			8,2	12,2	71,5	3,34	1,71	10
		50	ICALCU5050V	Al 16 / CU 14			10	14,5	77	4,35	2,65	10
70	95	25	ICALCU7025V	Al 18 / CU 10	11,2	18,5	7	10	79	3,62	1,06	10
		35	ICALCU7035V	Al 18 / CU 12			8,2	12,2	79	4,22	1,55	10
		50	ICALCU7050V	Al 18 / CU 14			10	14,5	85	5,33	2,65	10
		70	ICALCU7070V	Al 18 / CU 16			11,5	16,5	88	6,40	3,67	10