


Al-Cu connector - DIN 46267

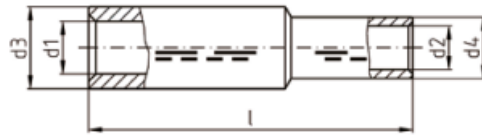

Al 99,5%
Cu-ETP DIN 13601

filled with contact grease / closed
with oil stop
for Al conductors according to DIN EN 60228 and Al
ropes according to DIN EN 50182

DIN 46267 p. 1, 2

mm ²			Art. N.	Reference	mm					kg (/100)	kg (/100) Cu	Pack
Al RC/S*	Al C**	Cu RC/S*			d1	d3	d2	d4	l			
95	120	35	ICALCU9535V	Al 22 / CU 12	13,2	22	8,2	12,2	79	5,74	1,66	10
		50	ICALCU9550V	Al 22 / CU 14			10	14,5	85	6,91	2,65	10
		70	ICALCU9570V	Al 22 / CU 16			11,5	16,5	87	7,89	3,68	10
		95	ICALCU9595V	Al 22 / CU 18			13,5	19	94	9,88	5,62	10
120	150	50	ICALCU12050V	Al 22 / CU 14	14,7	23	10	14,5	87	6,65	2,73	10
		70	ICALCU12070V	Al 22 / CU 16			11,5	16,5	89	7,61	3,58	10
		95	ICALCU12095V	Al 22 / CU 18			13,5	19	97	9,77	5,62	10
150	185	120	ICALCU120120V	Al 22 / CU 20			15,5	21	98	10,82	6,61	10
		70	ICALCU15070V	Al 25 / CU 16	16,3	25	11,5	16,5	101	9,59	3,58	5
		95	ICALCU15095V	Al 25 / CU 18			13,5	19	108	11,66	5,62	5
		120	ICALCU150120V	Al 25 / CU 20			15,5	21	108	12,59	6,61	5
185	240	150	ICALCU150150V	Al 25 / CU 22			17	23,5	113	15,50	9,46	5
		95	ICALCU18595V	Al 28 / CU 18	18,3	28,5	13,5	19	108	13,00	5,62	5
		120	ICALCU185120V	Al 28 / CU 20			15,5	21	108	14,01	6,61	5
		150	ICALCU185150V	Al 28 / CU 22			17	23,5	113	16,93	9,47	5
240	300	185	ICALCU185185V	Al 28 / CU 25			19	25,5	116	18,53	10,97	5
		120	ICALCU240120V	Al 32 / CU 20	21	32	15,5	21	120	17,36	6,60	5
		150	ICALCU240150V	Al 32 / CU 22			17	23,5	124	20,08	9,27	5
		185	ICALCU240185V	Al 32 / CU 25			19	25,5	127	21,84	10,97	5
300	-	240	ICALCU240240V	Al 32 / CU 28			21,5	29	128	25,85	14,89	5
		150	ICALCU300150V	Al 34 / CU 22	23,3	34	17	23,5	124	20,51	9,27	1
		185	ICALCU300185V	Al 34 / CU 25			19	25,5	128	22,58	11,19	1
		240	ICALCU300240V	Al 34 / CU 28			21,5	29	128	25,63	13,71	1
400	-	300	ICALCU300300V	Al 34 / CU 32			24,5	32	138	30,56	18,58	1
		185	ICALCU400185V	Al 38 / CU 25	26	38,5	19	25,5	131	26,70	11,20	1
		240	ICALCU400240V	Al 38 / CU 28			21,5	29	129	29,30	13,70	1
500	-	300	ICALCU400300V	Al 38 / CU 32			24,5	32	139	34,30	18,60	1
		240	ICALCU500240V	Al 44 / CU 28	29	44	21,5	29	139	36,66	13,71	1
		300	ICALCU500300V	Al 44 / CU 32			24,5	32	149	41,73	18,58	1
		400	ICALCU500400V	Al 44 / CU 38			27,5	38,5	168	62,24	41,10	1