

Sleeve Conduit-fm

with sleeve integrally formed

FM-MR 20 F


EAN Code: 4046933004315

Smallest packaging unit:3 m

quantity unit:m M



the photorealistic images are to be considered as reference images

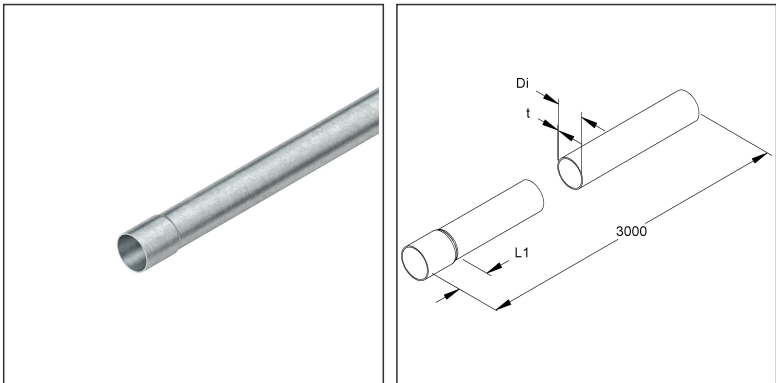

Article Description

Sleeve conduit, with sleeve integrally formed,conduit-A-Ø 20 mm,L=3000, Stahl, feuerverzinkt nach EN ISO 1461

Additional Price Information

Article group	FT-Rohr
quantity unit	m

Weight

Weight per quantity unit	522 g / m
Weight in kg per 100	52 kg / 100m

Technical Datasheet

Electrical installation conduit

FM-MR 20 F

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	22.20 mm
Width	22.20 mm
Depth/length	3000 mm
Diameter	22.20 mm

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	23.00 mm	Height	23.00 mm
Gross weight	1,56 kg	Volume	0,001 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

2430 meters = 1 rack					
Lenght	3000 mm	Width	1162 mm	Height	1120 mm
Gross weight	1365 kg	Volume	3,904 m³		
Min. Quantity	2.430.00 m	Max. Quantity	2.430.00 m		

Tender Text

Sleeve conduit-fm acc. to DIN EN 61386-1 / DIN EN 61386-21, with sleeve moulded on one side, can be used for extreme mechanical requirements and fixed connections due to its heavy compressive strength.

Dimensions (approx. dimensions) conduit-Ø outside : 20 mm

Inside-Ø Di : 18 mm

Material thickness t : 1 mm Length of the sleeve inside : 25 mm

Delivery length L total : 3000 mm

Usable cross section : 254 mm²

Classification : 4557 for heavy mechanical stress

Surface : hot-dip galvanised acc. to DIN EN ISO 1461

Material : steel, material no. E235 Fintech Model-No. : FM-MR 20 F

EP Material_____ EP Wage_____

Unit price per meter

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73063012

Technical Datasheet

Electrical installation conduit

FM-MR 20 F

the photorealistic images are to be considered as reference images

Related items

Accessories

Model No.	Description
IEE 20	End nozzle, for conduit-Ø 20 mm, inner and outer thighs of equal lengt, Kunststoff, PVC-weich, RAL 7001, silbergrau
IEEK 20	End nozzle, for conduit-Ø 20 mm, with short inner thigh, plastics, polyethylene, RAL 7035, light grey
IEEK 20 A	End nozzle, for conduit-Ø 20 mm, with short inner thigh, Kunststoff, Polyethylen, RAL 9005, schwarz
IESB 20 F	Plug-in conduit elbow 90°, for conduit-Ø 20 mm, inner radius 60 mm, Stahl, feuerverzinkt DIN EN ISO 1461
IPA 20 F	Conduit- a. cable distance clamp, f. conduit-Ø M20, clamp. range 19-24, Stahl, feuerverzinkt DIN EN ISO 1461
IPA 20 G F	Conduit- a. cable distance clamp, f. conduit-Ø M20, clamp. range 19-24, Stahl, feuerverzinkt DIN EN ISO 1461
IPA 20 G S	Conduit- c. distance clamp, pipe-Ø20 mm,cab. clamping range -Ø19-24 mm, steel, pre-galvanised according to DIN EN 10346, with theread M6
IPA 20 S	Conduit- c. distance clamp, pipe-Ø20 mm,cab. clamping range -Ø19-24 mm, steel, pre-galvanised according to DIN EN 10346, with mounting slot