

Sleeve Conduit-fm

with sleeve integrally formed

FM-MR 25 E3


EAN Code: 4046933004292

Smallest packaging unit:3 m

quantity unit:m M



the photorealistic images are to be considered as reference images

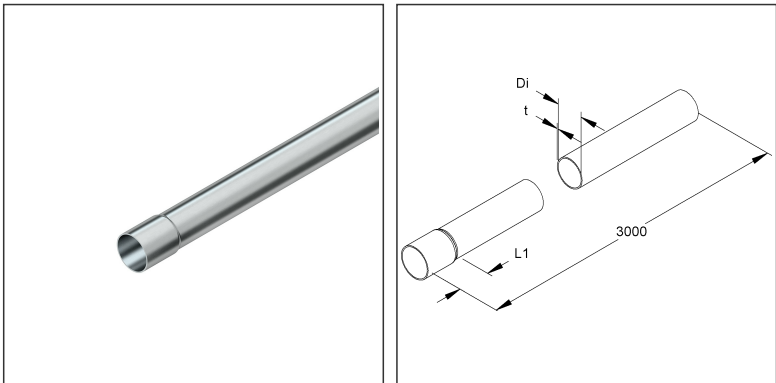

Article Description

Sleeve conduit, with sleeve integrally formed,conduit-A-Ø 25 mm,L=3000, stainless steel, material code: 1.4301, brushed

Additional Price Information

Article group	FT-Rohr
quantity unit	m

Weight

Weight per quantity unit	710 g / m
Weight in kg per 100	71 kg / 100m

Technical Datasheet

Electrical installation conduit

FM-MR 25 E3

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	27.60 mm
Width	27.60 mm
Depth/length	3000 mm
Diameter	27.60 mm

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	28.00 mm	Height	28.00 mm
Gross weight	2,13 kg	Volume	0,002 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

1260 meters = 1 rack					
Lenght	3000 mm	Width	1162 mm	Height	1120 mm
Gross weight	992 kg	Volume	3,904 m³		
Min. Quantity	1.260.00 m	Max. Quantity	1.260.00 m		

Tender Text

Sleeve conduit-fm acc. to DIN EN 61386-1 / DIN EN 61386-21, with sleeve moulded on one side, can be used for extreme mechanical requirements and strong connections due to its very high compressive strength, high corrosion resistance. Dimensions (approx. dimensions) conduit-Ø outside : 25 mm
Inside-Ø Di : 22,6 mm
Material thickness t : 1,2 mm Length of the sleeve inside : 32 mm
Delivery length L total : 3000 mm
Usable cross-section : 401 mm²
Classification : 5557 for very heavy mechanical stress
Surface : brushed
Material : stainless steel, material no. 1.4301
Fintech model no. : FM-MR 25 E3
EP Material_____ EP Wage_____
Unit price/meter

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73064080

Technical Datasheet

Electrical installation conduit

FM-MR 25 E3

the photorealistic images are to be considered as reference images

Related items

Accessories

Model No.	Description
IEE 25	End nozzle, for conduit-Ø 25 mm, inner and outer thighs of equal lengt, Kunststoff, PVC-weich, RAL 7001, silbergrau
IEEK 25	End nozzle, for conduit-Ø 25 mm, with short inner thigh, plastics, polyethylene, RAL 7035, light grey
IEEK 25 A	End nozzle, for conduit-Ø 25 mm, with short inner thigh, Kunststoff, Polyethylen, RAL 9005, schwarz
IESB 25 E5	Plug-in conduit elbow 90°, for conduit-Ø 25 mm, inner radius 70,3 mm, stainless steel, material code: 1.4571
IPA 25 G E5	Conduit- a. cable distance clamp, f. conduit-Ø M25, clamp. range 24-29, Edelstahl, Werkstoff-Nr.: 1.4571