

Sleeve Conduit-fm

with sleeve integrally formed

FM-MR 25 F


EAN Code: 4046933004278

Smallest packaging unit:3 m

quantity unit:m M



the photorealistic images are to be considered as reference images

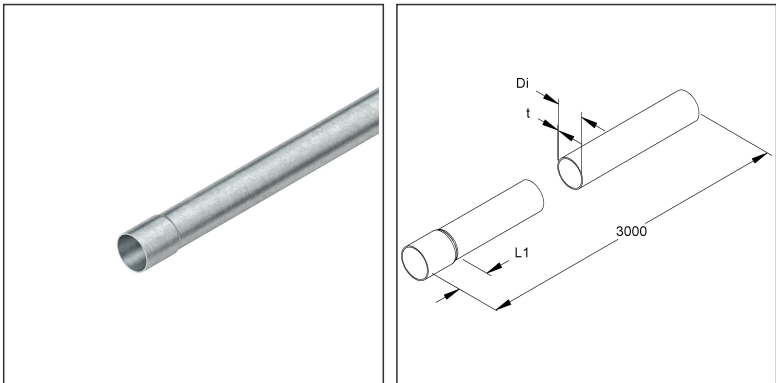

Article Description

Sleeve conduit, with sleeve integrally formed,conduit-A-Ø 25 mm,L=3000, Stahl, feuerverzinkt nach EN ISO 1461

Additional Price Information

|               |         |
|---------------|---------|
| Article group | FT-Rohr |
| quantity unit | m       |

Weight

|                          |              |
|--------------------------|--------------|
| Weight per quantity unit | 783 g / m    |
| Weight in kg per 100     | 78 kg / 100m |

# Technical Datasheet

## Electrical installation conduit

FM-MR 25 F

the photorealistic images are to be considered as reference images

### Physical Article Dimensions

|              |          |
|--------------|----------|
| Height       | 27.60 mm |
| Width        | 27.60 mm |
| Depth/length | 3000 mm  |
| Diameter     | 27.60 mm |

### Packing Dimension

|                             |            |                                                        |            |        |          |
|-----------------------------|------------|--------------------------------------------------------|------------|--------|----------|
| <b>3 meters = 1 piece</b>   |            | ✓ VP1-smallest packaging unit ( PU) ✓ VP1-preferred PU |            |        |          |
| Lenght                      | 3000 mm    | Width                                                  | 28.00 mm   | Height | 28.00 mm |
| Gross weight                | 2,35 kg    | Volume                                                 | 0,002 m³   |        |          |
| Min. quantity               | 3.00 m     | Max. Quantity                                          | 3.00 m     |        |          |
|                             |            |                                                        |            |        |          |
| <b>1260 meters = 1 rack</b> |            |                                                        |            |        |          |
| Lenght                      | 3000 mm    | Width                                                  | 1162 mm    | Height | 1120 mm  |
| Gross weight                | 1084 kg    | Volume                                                 | 3,904 m³   |        |          |
| Min. Quantity               | 1.260.00 m | Max. Quantity                                          | 1.260.00 m |        |          |

### Tender Text

Sleeve conduit-fm acc. to DIN EN 61386-1 / DIN EN 61386-21, with sleeve moulded on one side, can be used for extreme mechanical requirements and fixed connections due to its heavy compressive strength.  
Dimensions (approx. dimensions) conduit-Ø outside : 25 mm  
Inside-Ø Di : 22,6 mm  
Material thickness t : 1,2 mm Length of the sleeve inside : 32 mm  
Delivery length L total : 3000 mm  
Usable cross section : 401 mm²  
Classification : 4557 for heavy mechanical stress  
Surface : hot-dip galvanised acc. to DIN EN ISO 1461  
Material : steel, material no. E235 Fintech Model-No. : FM-MR 25 F  
EP Material\_\_\_\_\_ EP Wage\_\_\_\_\_  
Unit price per meter

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 27.06.2024  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                       |          |
|-----------------------|----------|
| Country of origin     | DE       |
| Customs tariff number | 73063012 |

# Technical Datasheet

## Electrical installation conduit

FM-MR 25 F

the photorealistic images are to be considered as reference images

### Related items

### Accessories

| Model No.  | Description                                                                                                                              |
|------------|------------------------------------------------------------------------------------------------------------------------------------------|
| IEE 25     | End nozzle, for conduit-Ø 25 mm, inner and outer thighs of equal lengt, Kunststoff, PVC-weich, RAL 7001, silbergrau                      |
| IEEK 25    | End nozzle, for conduit-Ø 25 mm, with short inner thigh, plastics, polyethylene, RAL 7035, light grey                                    |
| IEEK 25 A  | End nozzle, for conduit-Ø 25 mm, with short inner thigh, Kunststoff, Polyethylen, RAL 9005, schwarz                                      |
| IESB 25 F  | Plug-in conduit elbow 90°, for conduit-Ø 25 mm, inner radius 70,3 mm, Stahl, feuerverzinkt DIN EN ISO 1461                               |
| IPA 25 F   | Conduit- a. cable distance clamp, f. conduit-Ø M25, clamp. range 24-29, Stahl, feuerverzinkt DIN EN ISO 1461                             |
| IPA 25 G F | Conduit- a. cable distance clamp, f. conduit-Ø M25, clamp. range 24-29, Stahl, feuerverzinkt DIN EN ISO 1461                             |
| IPA 25 G S | Conduit- c. distance clamp, pipe-Ø25 mm,cab. clamping range -Ø24-29 mm, steel, pre-galvanised according to DIN EN 10346, with theread M6 |
| IPA 25 S   | Conduit- a. cable distance clamp, f. conduit-Ø M25, clamp. range 24-29, Stahl, bandverzinkt DIN EN 10346                                 |