


Plug-In Conduit-IEC

IESR 25 AL

EAN Code: 4046933001093
Smallest packaging unit:3 m
quantity unit:m M

the photorealistic images are to be considered as reference images

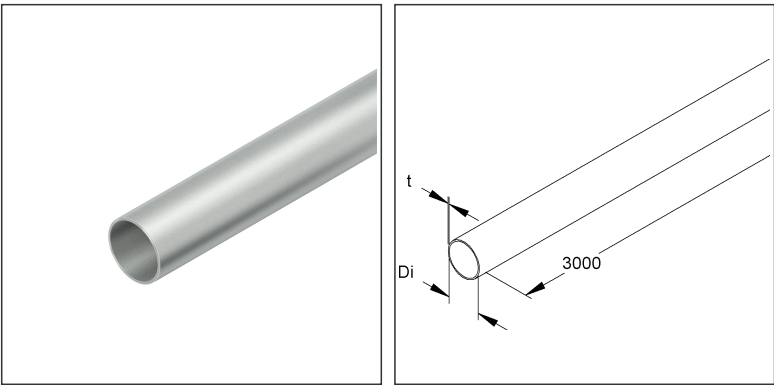

Article Description

Plug-in conduit, outside-Ø 25 mm, inside-Ø 22,6 mm, length 3000 mm, Aluminium

Additional Price Information

Article group	FT-Rohr
quantity unit	m

Weight

Weight per quantity unit	243 g / m
Weight in kg per 100	24 kg / 100m

Physical Article Dimensions

Height	25.00 mm
Width	25.00 mm
Depth/length	3000 mm
Diameter	25.00 mm

Technical Datasheet

Electrical installation conduit

IESR 25 AL

the photorealistic images are to be considered as reference images

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	25.00 mm	Height	25.00 mm
Gross weight	0,73 kg	Volume	0,001 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

30 meters = 1 bundle			
Gross weight	7,27 kg		
Min. Quantity	30.00 m	Max. Quantity	30.00 m

3600 meters = 1 rack					
Gross weight	970 kg	Volume	3,904 m³		
Min. Quantity	3.600.00 m	Max. Quantity	3.600.00 m		
Lenght	3000 mm	Width	1162 mm	Height	1120 mm

Tender Text

Plug-in conduit acc. to DIN EN 61386-1 / DIN EN 61386-21, can be used for extreme mechanical requirements due to heavy compressive strength.
Dimensions (approx. dimensions) conduit-Ø outside : 25 mm
Inside-Ø Di : 22,6 mm
Material thickness t : 1,2 mm
Delivery length L : 3000 mm
Usable cross-section : 401 mm² Classification 4456 for heavy mechanical loads
Surface : pressed / bright-machined
Material : Aluminium alloy, Material No. 3.3206 EN AW 6060 T66
Fintech Model No. : IESR 25 AL
EP Material _____ EP Wage _____
Unit price per meter _____

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	
Customs tariff number	76109090

Technical Datasheet

Electrical installation conduit

IESR 25 AL

the photorealistic images are to be considered as reference images

Related items

Accessories

Model No.	Description
IEE 25	End nozzle, for conduit-Ø 25 mm, inner and outer thighs of equal lengt, Kunststoff, PVC-weich, RAL 7001, silbergrau
IEE 25 AL	End nozzle, for conduit-Ø 25 mm, without inner thighs, Aluminium
IEEK 25	End nozzle, for conduit-Ø 25 mm, with short inner thigh, plastics, polyethylene, RAL 7035, light grey
IEEK 25 A	End nozzle, for conduit-Ø 25 mm, with short inner thigh, Kunststoff, Polyethylen, RAL 9005, schwarz
IESB 25 AL	Plug-in conduit elbow 90°, for conduit-Ø 25 mm, inner radius 70 mm, Aluminium
IESM 25 AL	Plug-in sleeve, for conduit-Ø 25 mm, length 55 mm, Aluminium
IK 25 AL	Clamping chip, for conduit-Ø 25 mm, aluminium
IPA 25 AL	Conduit- a. cable distance clamp, f. conduit-Ø M25, clamp. range 24-29, Aluminium