

Electrical Conduit

MI 30/6 F


EAN Code: 4013339906901

Smallest packaging unit: 6 m

quantity unit: m M



the photorealistic images are to be considered as reference images

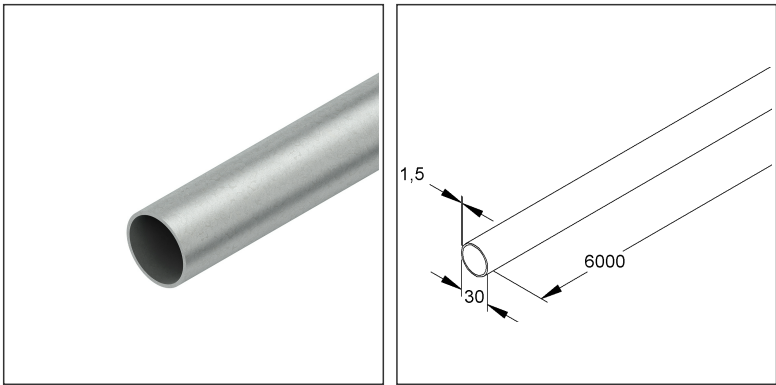

Article Description

Machine installation conduit, Ø 30 mm, length 6000 mm, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	1,160 kg / m
Weight in kg per 100	116 kg / 100m

Physical Article Dimensions

Height	30.00 mm
Width	30.00 mm
Depth/length	6000 mm
Diameter	30.00 mm

Technical Datasheet

Machine installation conduit

MI 30/6 F

the photorealistic images are to be considered as reference images

Packing Dimension

6 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	6000 mm	Width	30.00 mm	Height	30.00 mm
Gross weight	6,96 kg	Volume	0,004 m³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		

1014 meters = 1 bundle					
Lenght	6000 mm	Width	390 mm	Height	390 mm
Gross weight	920 kg	Volume	0,913 m³		
Min. Quantity	1.014.00 m	Max. Quantity	1.014.00 m		

Tender Text

Machine installation conduit, for the cable protection pipe system.	
Dimensions (approx. dimensions)	
Pipe-Ø : 30 mm	
Material thickness t : 1.5 mm	
Delivery length L : 6000 mm	
Material : steel, hot-dip galvanised according to DIN EN ISO 1461	
NIEDAX Model no. : MI 30/6 F	
EP Material	EP Wage
Unit price/metre	

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	
Customs tarif number	73063012

Related items

Connector

Model No.	Description
MIK 30 F	Coupling, Ø 30 mm, steel, hot dip galvanised DIN EN ISO 1461
MIKG 30 F	Coupling, perforated, Ø 30 mm, steel, hot dip galvanised DIN EN ISO 1461