

Electrical Conduit

MI 60/6 F


EAN Code: 4013339907328

Smallest packaging unit: 6 m

quantity unit: m M



the photorealistic images are to be considered as reference images

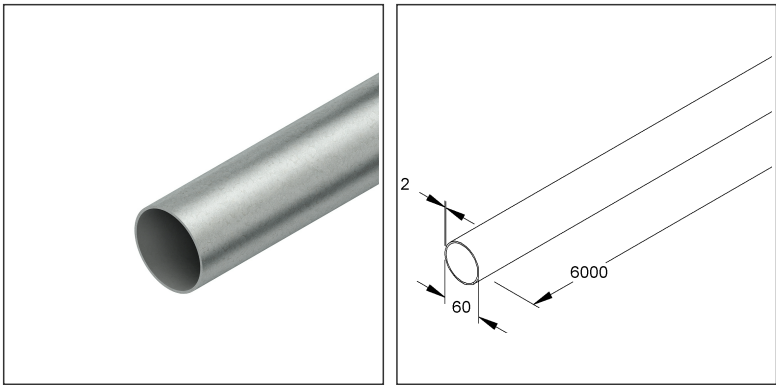

Article Description

Machine installation conduit, Ø 60 mm, length 6000 mm, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

|               |     |
|---------------|-----|
| Article group | N13 |
| quantity unit | m   |

Weight

|                          |               |
|--------------------------|---------------|
| Weight per quantity unit | 2,817 kg / m  |
| Weight in kg per 100     | 282 kg / 100m |

Physical Article Dimensions

|              |          |
|--------------|----------|
| Height       | 60.00 mm |
| Width        | 60.00 mm |
| Depth/length | 6000 mm  |
| Diameter     | 60.00 mm |

# Technical Datasheet

## Machine installation conduit

MI 60/6 F

the photorealistic images are to be considered as reference images

### Packing Dimension

|                           |         |                                     |          |                    |          |
|---------------------------|---------|-------------------------------------|----------|--------------------|----------|
| <b>6 meters = 1 piece</b> |         | ✓ VP1-smallest packaging unit ( PU) |          | ✓ VP1-preferred PU |          |
| Lenght                    | 6000 mm | Width                               | 60.00 mm | Height             | 60.00 mm |
| Gross weight              | 17 kg   | Volume                              | 0,017 m³ |                    |          |
| Min. quantity             | 6.00 m  | Max. Quantity                       | 6.00 m   |                    |          |

|                              |          |               |          |        |        |
|------------------------------|----------|---------------|----------|--------|--------|
| <b>366 meters = 1 bundle</b> |          |               |          |        |        |
| Lenght                       | 6000 mm  | Width         | 480 mm   | Height | 480 mm |
| Gross weight                 | 1031 kg  | Volume        | 1,382 m³ |        |        |
| Min. Quantity                | 366.00 m | Max. Quantity | 366.00 m |        |        |

### Tender Text

|                                                                     |         |
|---------------------------------------------------------------------|---------|
| Machine installation conduit, for the cable protection pipe system. |         |
| Dimensions (approx. dimensions)                                     |         |
| Pipe-Ø : 60 mm                                                      |         |
| Material thickness t : 2 mm                                         |         |
| Delivery lengt L : 6000 mm                                          |         |
| Material : steel, hot-dip galvanised according to DIN EN ISO 1461   |         |
| NIEDAX Model no. : MI 60/6 F                                        |         |
| EP Material                                                         | EP Wage |
| Unit price/metre                                                    |         |

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 27.06.2024  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                      |          |
|----------------------|----------|
| Country of origin    |          |
| Customs tarif number | 73063012 |

### Related items

### Connector

| Model No. | Description                                                              |
|-----------|--------------------------------------------------------------------------|
| MIK 60 F  | Coupling, Ø 60 mm, steel, hot dip galvanised DIN EN ISO 1461             |
| MIKG 60 F | Coupling, perforated, Ø 60 mm, steel, hot dip galvanised DIN EN ISO 1461 |