


Elbow 90°

with beaded, round and unperforated side profiles, but with connector perforations

WSBR 105.400 F

EAN Code: 4013339950683
Smallest packaging unit:1 pc.

the photorealistic images are to be considered as reference images

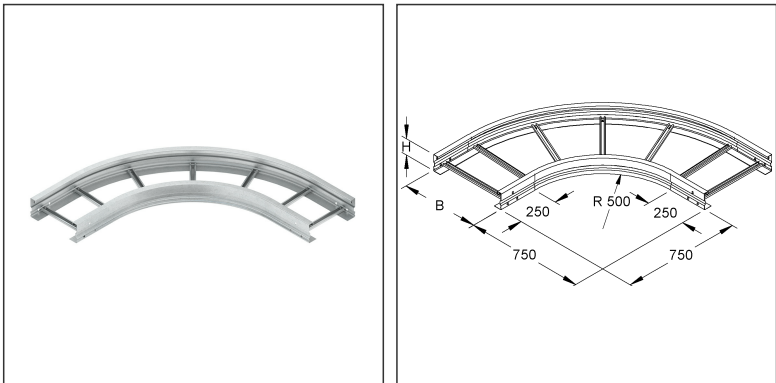

Article Description

Elbow 90° for WSL, 105x400 mm, round, beaded, unperforated, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	11 kg/ pcs.
Weight in kg per 100	1117 kg/ 100pcs.

Physical Article Dimensions

Height	105.00 mm
Width	1150 mm
Depth/length	1150 mm

Technical Datasheet

Long Span Cable Ladder

WSBR 105.400 F

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	1150 mm	Width	1150 mm	Height	105.00 mm
Gross weight	11 kg	Volume	0,139 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

Tender Text

Elbow 90°, with corrugated, round and unperforated side beams, with connector perforation for connection, for wide span cable ladder, dimensionally stable due to riveted C-profile rungs open at the top with 16 mm slot width, for the creation of horizontal 90° branches. Please order splice plate WSV 105.390 separately.

The fitting radii are designed so that the cables can be laid in accordance with DIN/VDE 0298 Part 3. You will find suitable U-clamps (B... and BK...) in the KI catalogue.

Butt joints must be supported in the immediate vicinity by an appropriate supporting structure.

Suitable for : Wide span cable ladder WSL 105...

Dimensions (approx. dimensions)

Height H x Width W : 105 x 400 mm

Dimensions outside : 750 mm + W

Inner beam radius R : 500 mm

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : WSBR 105.400 F

EP Material_____ EP Wage_____

Unit price/piece

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Cover

Model No.	Description
WBRDV 400 F	Cover for elbow 90° for WSL/WRL, width 404 mm, with turning lock, steel, hot dip galvanised DIN EN ISO 1461
WDRS 20 F	Turning bolt with locknut acc. to DIN EN ISO 10511, for WSL/WRL, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Technical Datasheet

Long Span Cable Ladder

WSBR 105.400 F

the photorealistic images are to be considered as reference images

Related items

Connector

Model No.	Description
WSV 105.390 F	Splice plate, 106,5x390 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories