

Wide Span Cable Ladder

rung spacing 300 mm, with continuously perforated and beaded side profiles, with riveted, upwardly open C-profile rungs with 16 mm slot width

WSL 150.300 F



EAN Code: 4013339579709

Smallest packaging unit:6 m

quantity unit:m M



the photorealistic images are to be considered as reference images

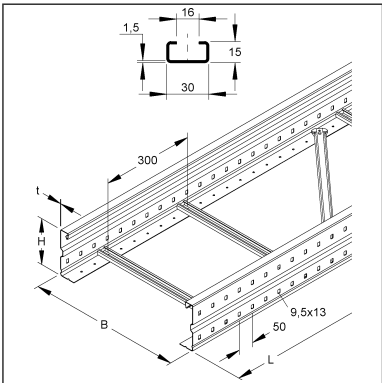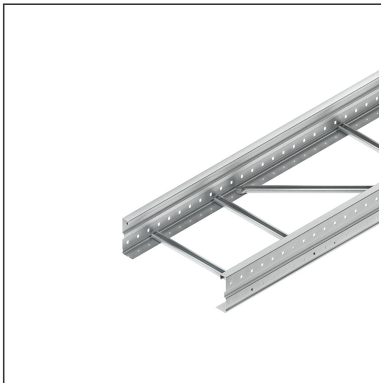

Article Description

Wide span cable ladder, 150x300x6000 mm, t=1,5 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

|               |     |
|---------------|-----|
| Article group | N13 |
| quantity unit | m   |

Weight

|                          |               |
|--------------------------|---------------|
| Weight per quantity unit | 7,484 kg / m  |
| Weight in kg per 100     | 748 kg / 100m |

# Technical Datasheet

## Long Span Cable Ladder


WSL 150.300 F

the photorealistic images are to be considered as reference images

### Physical Article Dimensions

|              |           |
|--------------|-----------|
| Height       | 150.00 mm |
| Width        | 300 mm    |
| Depth/length | 6000 mm   |

### Load Specifications

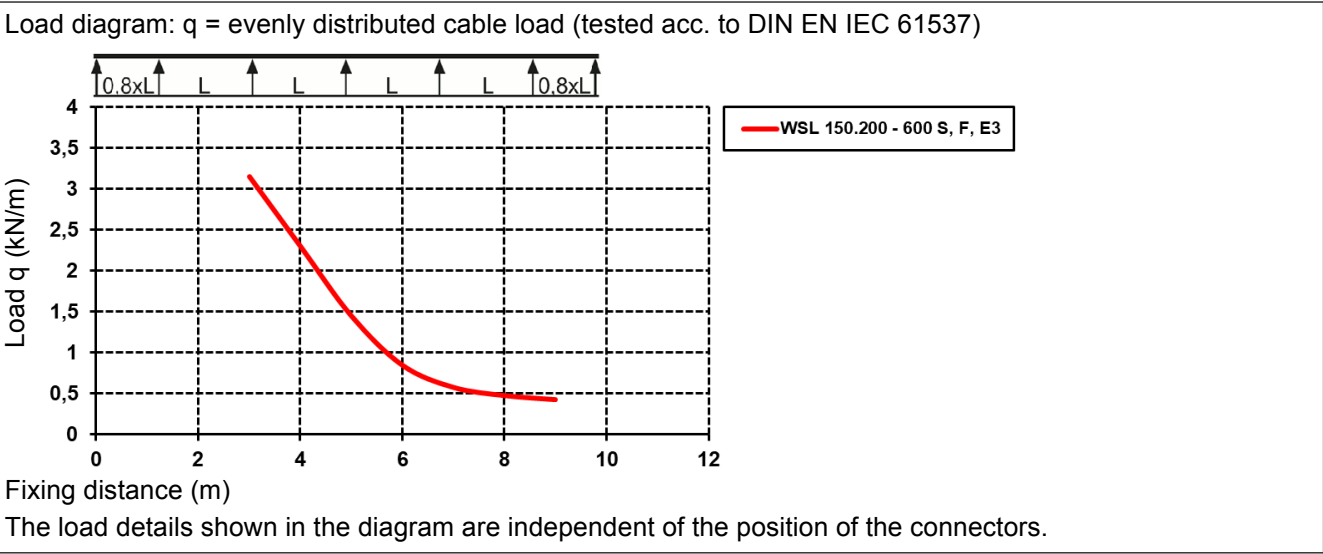

### Packing Dimension

|                           |         |                                      |          |                    |           |
|---------------------------|---------|--------------------------------------|----------|--------------------|-----------|
| <b>6 meters = 1 piece</b> |         | ✓ VP1-smallest packaging unit ( PU ) |          | ✓ VP1-preferred PU |           |
| Lenght                    | 6000 mm | Width                                | 300 mm   | Height             | 150.00 mm |
| Gross weight              | 45 kg   | Volume                               | 0,270 m³ |                    |           |
| Min. quantity             | 6.00 m  | Max. Quantity                        | 6.00 m   |                    |           |

### Tender Text

Wide span cable ladder, acc. to DIN EN 61537, with continuous perforated and corrugated side beams and rungs riveted in C-profile with 16 mm slot width. Suitable U-clamps (B... and BK...) can be found in the KI catalogue. Please order splice plate WSV 150.500 separately.

Dimensions (approx. dimensions) H x W : 150 x 300 mm

Material thickness : 1.5 mm Rung distance : 300 mm

Side beam perforation : 9.5 x 13 mm

Hole distance : 50 mm

Delivery length : 6000 mm

Usable cross-section : 38485 mm²

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : WSL 150.300 F

EP Material\_\_\_\_\_ EP Wage\_\_\_\_\_

Unit price/meter

# Technical Datasheet

## Long Span Cable Ladder

WSL 150.300 F

the photorealistic images are to be considered as reference images

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 27.06.2024  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                       |          |
|-----------------------|----------|
| Country of origin     | DE       |
| Customs tariff number | 73089059 |

### Related items

#### Cover

| Model No. | Description                                                                                                                   |
|-----------|-------------------------------------------------------------------------------------------------------------------------------|
| WDRS 20 F | Turning bolt with locknut acc. to DIN EN ISO 10511, for WSL/WRL, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories |
| WDV 300 F | Cover for WSL/WRL, w. joint strip, 304x3000 mm, with turning lock, steel, hot dip galvanised DIN EN ISO 1461                  |

#### Barrier strip

| Model No. | Description                                                                                                       |
|-----------|-------------------------------------------------------------------------------------------------------------------|
| KLWC 16 F | Barrier strip fastening clamp, for 16 mm slot width, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories |
| RW 110 F  | Barrier strip, 98x3000 mm, t=0,9 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories                 |

#### Connector

| Model No.     | Description                                                                              |
|---------------|------------------------------------------------------------------------------------------|
| WSV 150.500 F | Splice plate, 151,5x500 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories |