

Wide Span Cable Ladder

rung spacing 300 mm, with continuously perforated and beaded side profiles, with riveted, upwardly open C-profile rungs with 16 mm slot width

WSL 200.200 F



EAN Code: 4013339581603

Smallest packaging unit: 6 m

quantity unit: m M



the photorealistic images are to be considered as reference images

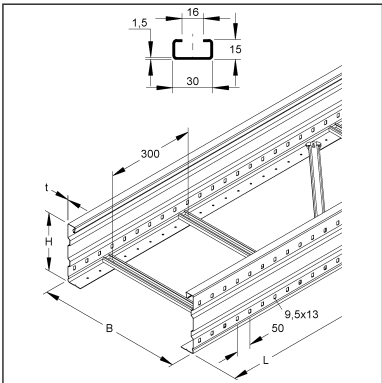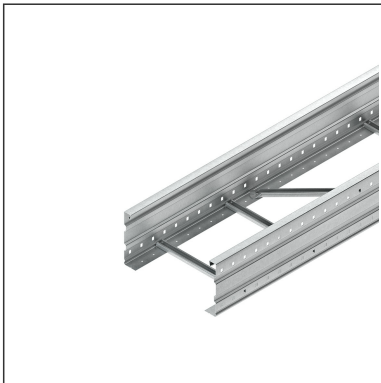

Article Description

Wide span cable ladder, 200x200x6000 mm, t=1,5 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	8,688 kg / m
Weight in kg per 100	869 kg / 100m

Technical Datasheet

Long Span Cable Ladder

WSL 200.200 F

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	200.00 mm
Width	200.00 mm
Depth/length	6000 mm

Load Specifications

Load diagram: q = evenly distributed cable load (tested acc. to DIN EN IEC 61537)



The load details shown in the diagram are independent of the position of the connectors.

Packing Dimension

6 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	6000 mm	Width	200.00 mm	Height	200.00 mm
Gross weight	52 kg	Volume	0,240 m³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		

Tender Text

Wide span cable ladder, acc. to DIN EN 61537, with continuous perforated and corrugated side beams and rungs riveted in C-profile with 16 mm slot width. Suitable U-clamps (B... and BK...) can be found in the KI catalogue. Please order splice plate WSV 200.500 separately.

Dimensions (approx. dimensions) H x W : 200 x 200 mm

Material thickness : 1.5 mm Rung distance : 300 mm

Side beam perforation : 9.5 x 13 mm

Hole distance : 50 mm

Delivery length : 6000 mm

Usable cross-section : 35135 mm²

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : WSL 200.200 F

EP Material_____ EP Wage_____

Unit price/meter

Technical Datasheet

Long Span Cable Ladder

WSL 200.200 F

the photorealistic images are to be considered as reference images

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Cover

Model No.	Description
WDRS 20 F	Turning bolt with locknut acc. to DIN EN ISO 10511, for WSL/WRL, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
WDV 200 F	Cover for WSL/WRL, w. joint strip, 204x3000 mm, with turning lock, steel, hot dip galvanised DIN EN ISO 1461

Barrier strip

Model No.	Description
KLWC 16 F	Barrier strip fastening clamp, for 16 mm slot width, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RW 110 F	Barrier strip, 98x3000 mm, t=0,9 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Connector

Model No.	Description
WSV 200.500 F	Splice plate, 201,5x500 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories