


Vertical Cable Ladder

rung spacing 600 mm, with continuously perforated side profiles

STL 60.206/3

EAN Code: 4013339921201
 Smallest packaging unit:3 m
 quantity unit:m M

the photorealistic images are to be considered as reference images

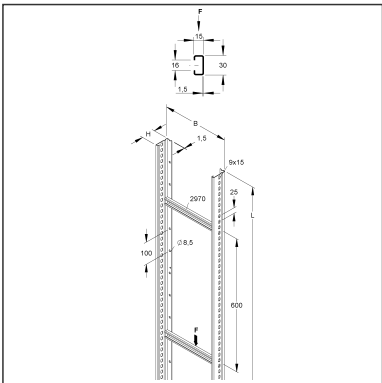

Article Description

Vertical cable ladder, 60x200x3000 mm, rung distance 600 mm, steel, pre-galvanised according to DIN EN 10346

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	2,434 kg / m
Weight in kg per 100	243 kg / 100m

Technical Datasheet

Vertical Cable Ladder System

STL 60.206/3

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	60.00 mm
Width	199.00 mm
Depth/length	3000 mm

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	199.00 mm	Height	60.00 mm
Gross weight	7,3 kg	Volume	0,036 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

288 meters = 1 rack					
Lenght	3000 mm	Width	1162 mm	Height	1120 mm
Gross weight	799 kg	Volume	3,904 m³		
Min. Quantity	288.00 m	Max. Quantity	288.00 m		

Tender Text

Vertical cable ladder acc. to DIN EN 61537, for wall mounting, with continuously perforated and profiled side beams, with riveted rungs made of C-profiles with 16 mm slot width. Suitable U-clamps (B... and BK...).

Dimensions (approx. dimensions) H x W : 60 x 200 mm

Material thickness rail : 1.5 mm

Distance between rungs : 600 mm

Side beam perforation : 9 x 15 mm

Centre distance : 25 mm

Bottom perforation : Ø 8.5 mm and Ø 5.4 mm Centre distance : 100 mm and 50 mm

Load capacity at B/2 : 1.0 kN

Delivery length L : 3000 mm

Usable cross section : 8500 mm²

Material : steel, pre-galvanised acc. to DIN EN 10346

NIEDAX Model No. : STL 60.206/3

EP material_____ EP wage_____

Unit price/meter

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Technical Datasheet

Vertical Cable Ladder System

STL 60.206/3

the photorealistic images are to be considered as reference images

Related items

Cover

Model No.	Description
RDHFS 9 VZL	Cover clamp, steel, electro galvanised according to DIN EN ISO 2081, blue passivate
STVW 200 S	Vertical cable ladder cover, 203x209x3000 mm, wall mounting, steel, pre-galvanised according to DIN EN 10346, incl. accessories

Barrier strip

Model No.	Description
KLWC 16	Barrier strip fastening clamp, for 16 mm slot width, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RW 35	Barrier strip, 30x3000 mm, t=0,75 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories

Connector

Model No.	Description
KSV 60 S	Splice plate for cable ladder, height 60 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories