


Vertical Cable Ladder

rung spacing 300 mm, with continuously perforated side profiles

STL 60.603/6 F

EAN Code: 4013339921782  
Smallest packaging unit:6 m  
quantity unit:m M

the photorealistic images are to be considered as reference images

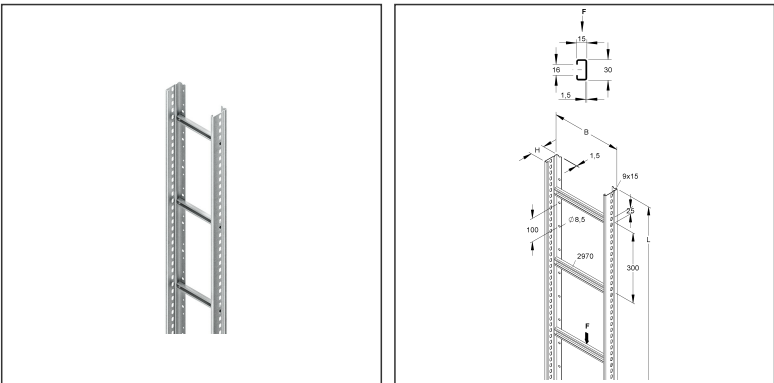

Article Description

Vertical cable ladder, 60x600x6000 mm, rung distance 300 mm, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

|               |     |
|---------------|-----|
| Article group | N13 |
| quantity unit | m   |

Weight

|                          |               |
|--------------------------|---------------|
| Weight per quantity unit | 4,062 kg / m  |
| Weight in kg per 100     | 406 kg / 100m |

Physical Article Dimensions

|              |          |
|--------------|----------|
| Height       | 60.00 mm |
| Width        | 599 mm   |
| Depth/length | 6000 mm  |

# Technical Datasheet

## Vertical Cable Ladder System

STL 60.603/6 F

the photorealistic images are to be considered as reference images

### Packing Dimension

|                           |         |                                     |          |                    |          |
|---------------------------|---------|-------------------------------------|----------|--------------------|----------|
| <b>6 meters = 1 piece</b> |         | ✓ VP1-smallest packaging unit ( PU) |          | ✓ VP1-preferred PU |          |
| Lenght                    | 6000 mm | Width                               | 599 mm   | Height             | 60.00 mm |
| Gross weight              | 24 kg   | Volume                              | 0,216 m³ |                    |          |
| Min. quantity             | 6.00 m  | Max. Quantity                       | 6.00 m   |                    |          |

### Tender Text

Vertical cable ladder acc. to DIN EN 61537, for wall mounting, with continuously perforated and profiled side beams, with riveted rungs made of C-profiles with 16 mm slot width. Suitable U-clamps (B... and BK...).

Dimensions (approx. dimensions) H x W : 60 x 600 mm

Material thickness beam : 1.5 mm

Distance between rungs : 300 mm

Side beam perforation : 9 x 15 mm

Centre distance : 25 mm

Bottom perforation : Ø 8.5 mm Centre distance : 100 mm

Load capacity at B/2 : 1.0 kN

Delivery length L : 6000 mm

Usable cross section : 25900 mm²

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : STL 60.603/6 F

EP material\_\_\_\_\_ EP wage\_\_\_\_\_

Unit price/meter

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 27.06.2024  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                       |          |
|-----------------------|----------|
| Country of origin     | DE       |
| Customs tariff number | 73089059 |

### Related items

#### Cover

| Model No.   | Description                                                                                                               |
|-------------|---------------------------------------------------------------------------------------------------------------------------|
| RDHFS 9 VZL | Cover clamp, steel, electro galvanised according to DIN EN ISO 2081, blue passivate                                       |
| STVW 600 F  | Vertical cable ladder cover, 203x609x3000 mm, wall mounting, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories |

# Technical Datasheet

## Vertical Cable Ladder System

STL 60.603/6 F

the photorealistic images are to be considered as reference images

### Related items

#### Barrier strip

| Model No. | Description                                                                                                       |
|-----------|-------------------------------------------------------------------------------------------------------------------|
| KLWC 16 F | Barrier strip fastening clamp, for 16 mm slot width, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories |
| RW 35 F   | Barrier strip, 30x3000 mm, t=0,75 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories                |

#### Connector

| Model No. | Description                                                                                               |
|-----------|-----------------------------------------------------------------------------------------------------------|
| KSV 60 F  | Splice plate for cable ladder, height 60 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories |