


Sleeve Conduit-fm

with sleeve integrally formed

FM-MR 16 E3

EAN Code: 4046933004377
Smallest packaging unit:3 m
quantity unit:m M

the photorealistic images are to be considered as reference images

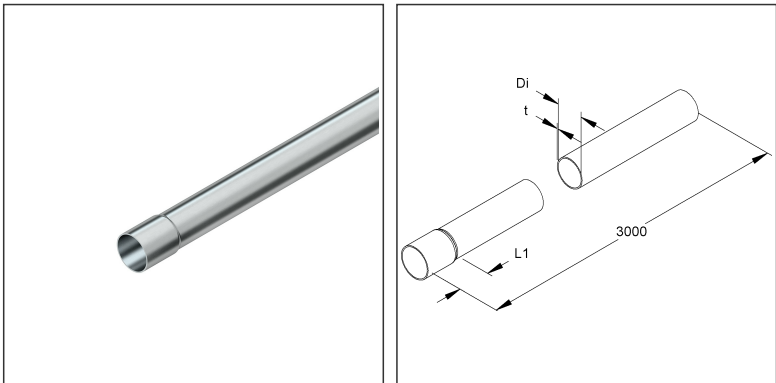

Article Description

Sleeve conduit, with sleeve integrally formed,conduit-A-Ø 16 mm,L=3000, stainless steel, material code: 1.4301, brushed

Additional Price Information

Article group	FT-Rohr
quantity unit	m

Weight

Weight per quantity unit	373 g / m
Weight in kg per 100	37 kg / 100m

Technical Datasheet

Electrical installation conduit

FM-MR 16 E3

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	18.20 mm
Width	18.20 mm
Depth/length	3000 mm
Diameter	18.20 mm

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	19.00 mm	Height	19.00 mm
Gross weight	1,12 kg	Volume	0,001 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

Tender Text

Sleeve conduit-fm acc. to DIN EN 61386-1 / DIN EN 61386-21, with sleeve moulded on one side, can be used for extreme mechanical requirements and strong connections due to its very high compressive strength, high corrosion resistance. Dimensions (approx. dimensions) conduit-Ø outside : 16 mm
Inside-Ø Di : 14 mm
Material thickness t : 1 mm Length of the sleeve inside : 25 mm
Delivery length L total : 3000 mm
Usable cross-section : 154 mm²
Classification : 5557 for very heavy mechanical stress
Surface : brushed
Material : stainless steel, material no. 1.4301
Fintech model no. : FM-MR 16 E3
EP Material_____ EP Wage_____
Unit price/meter

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73064080

Technical Datasheet

Electrical installation conduit

FM-MR 16 E3

the photorealistic images are to be considered as reference images

Related items

Accessories

Model No.	Description
IEE 16	End nozzle, for conduit-Ø 16 mm, inner and outer thighs of equal lengt, plastics, PVC-soft, RAL 7001, silver grey
IEEK 16	End nozzle, for conduit-Ø 16 mm, with short inner thigh, plastics, polyethylene, RAL 7035, light grey
IEEK 16 A	End nozzle, for conduit-Ø 16 mm, with short inner thigh, plastics, polyethylene, colour black
IESB 16 E5	Plug-in conduit elbow 90°, for conduit-Ø 16 mm, inner radius 40 mm, stainless steel, material code: 1.4571
IPA 16 G E5	Conduit- c. distance clamp, pipe-Ø16 mm,cab. clamping range -Ø15-19 mm, stainless steel, material code: 1.4571, with theread M6