


Sleeve Conduit-fm

with sleeve integrally formed

FM-MR 20 AL

EAN Code: 4046933004346
Smallest packaging unit:3 m
quantity unit:m M

the photorealistic images are to be considered as reference images

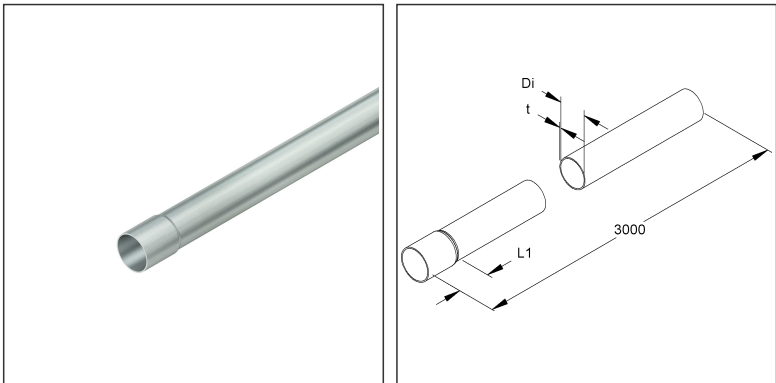

Article Description

Sleeve conduit, with sleeve integrally formed,conduit-A-Ø 20 mm,L=3000, aluminium

Additional Price Information

Article group	FT-Rohr
quantity unit	m

Weight

Weight per quantity unit	162 g / m
Weight in kg per 100	16 kg / 100m

Technical Datasheet

Electrical installation conduit

FM-MR 20 AL

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	22.20 mm
Width	22.20 mm
Depth/length	3000 mm
Diameter	22.20 mm

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	23.00 mm	Height	23.00 mm
Gross weight	0,48 kg	Volume	0,001 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

2430 meters = 1 rack					
Lenght	3000 mm	Width	1162 mm	Height	1120 mm
Gross weight	490 kg	Volume	3,904 m³		
Min. Quantity	2.430.00 m	Max. Quantity	2.430.00 m		

Tender Text

Sleeve conduit-fm acc. to DIN EN 61386-1 / DIN EN 61386-21, with sleeve moulded on one side, can be used for extreme mechanical requirements and strong connections due to its heavy impact resistance and heavy compressive strength. Dimensions (approx. dimensions) conduit-Ø outside : 20 mm
Inside-Ø Di : 18 mm
Material thickness t : 1 mm Length of the sleeve inside : 25 mm
Delivery length L total : 3000 mm
Usable cross section : 254 mm²
Classification : 4456 for heavy mechanical loads
Surface : pressed / bright-machined
Material : Aluminium alloy, Material No. 3.3206 EN AW 6060 T5
Fintech Model No. : FM-MR 20 AL
EP Material_____ EP Wage_____
Unit price per meter

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	
Customs tariff number	76082081

Technical Datasheet

Electrical installation conduit

FM-MR 20 AL

the photorealistic images are to be considered as reference images

Related items

Accessories

Model No.	Description
IEE 20	End nozzle, for conduit-Ø 20 mm, inner and outer thighs of equal lengt, Kunststoff, PVC-weich, RAL 7001, silbergrau
IEE 20 AL	End nozzle, for conduit-Ø 20 mm, without inner thighs, Aluminium
IEEK 20	End nozzle, for conduit-Ø 20 mm, with short inner thigh, plastics, polyethylene, RAL 7035, light grey
IEEK 20 A	End nozzle, for conduit-Ø 20 mm, with short inner thigh, Kunststoff, Polyethylen, RAL 9005, schwarz
IESB 20 AL	Plug-in conduit elbow 90°, for conduit-Ø 20 mm, inner radius 60 mm, Aluminium
IK 20 AL	Clamping chip, for conduit-Ø 20 mm, aluminium
IPA 20 AL	Conduit- a. cable distance clamp, f. conduit-Ø M20, clamp. range 19-24, Aluminium