


Sleeve Conduit-fm

with sleeve integrally formed

FM-MR 25 AL

EAN Code: 4046933004308
Smallest packaging unit:3 m
quantity unit:m M

the photorealistic images are to be considered as reference images

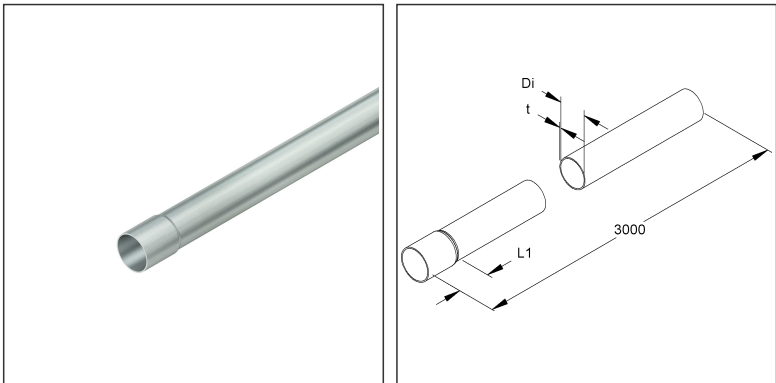

Article Description

Sleeve conduit, with sleeve integrally formed,conduit-A-Ø 25 mm,L=3000, Aluminium

Additional Price Information

Article group	FT-Rohr
quantity unit	m

Weight

Weight per quantity unit	243 g / m
Weight in kg per 100	24 kg / 100m

Technical Datasheet

Electrical installation conduit

FM-MR 25 AL

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	27.60 mm
Width	27.60 mm
Depth/length	3000 mm
Diameter	27.60 mm

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	3000 mm	Width	28.00 mm	Height	28.00 mm
Gross weight	0,73 kg	Volume	0,002 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

1260 meters = 1 rack					
Lenght	3000 mm	Width	1162 mm	Height	1120 mm
Gross weight	404 kg	Volume	3,904 m³		
Min. Quantity	1.260.00 m	Max. Quantity	1.260.00 m		

Tender Text

Sleeve conduit-fm acc. to DIN EN 61386-1 / DIN EN 61386-21, with sleeve moulded on one side, can be used for extreme mechanical requirements and strong connections due to its heavy impact resistance and heavy compressive strength. Dimensions (approx. dimensions) conduit-Ø outside : 25 mm
Inside-Ø Di : 22,6 mm
Material thickness t : 1,2 mm Length of the sleeve inside : 32 mm
Delivery length L total : 3000 mm
Usable cross section : 401 mm²
Classification : 4456 for heavy mechanical loads
Surface : pressed / bright-machined
Material : Aluminium alloy, Material No. 3.3206 EN AW 6060 T5
Fintech Model No. : FM-MR 25 AL
EP Material_____ EP Wage_____
Unit price per meter

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	
Customs tariff number	76082081

Technical Datasheet

Electrical installation conduit

FM-MR 25 AL

the photorealistic images are to be considered as reference images

Related items

Accessories

Model No.	Description
IEE 25	End nozzle, for conduit-Ø 25 mm, inner and outer thighs of equal lengt, Kunststoff, PVC-weich, RAL 7001, silbergrau
IEE 25 AL	End nozzle, for conduit-Ø 25 mm, without inner thighs, Aluminium
IEEK 25	End nozzle, for conduit-Ø 25 mm, with short inner thigh, plastics, polyethylene, RAL 7035, light grey
IEEK 25 A	End nozzle, for conduit-Ø 25 mm, with short inner thigh, Kunststoff, Polyethylen, RAL 9005, schwarz
IESB 25 AL	Plug-in conduit elbow 90°, for conduit-Ø 25 mm, inner radius 70 mm, Aluminium
IK 25 AL	Clamping chip, for conduit-Ø 25 mm, aluminium
IPA 25 AL	Conduit- a. cable distance clamp, f. conduit-Ø M25, clamp. range 24-29, Aluminium