


Sleeve Conduit-fm

with sleeve integrally formed

FM-MR 32 AL

EAN Code: 4046933004261  
Smallest packaging unit:3 m  
quantity unit:m M

the photorealistic images are to be considered as reference images

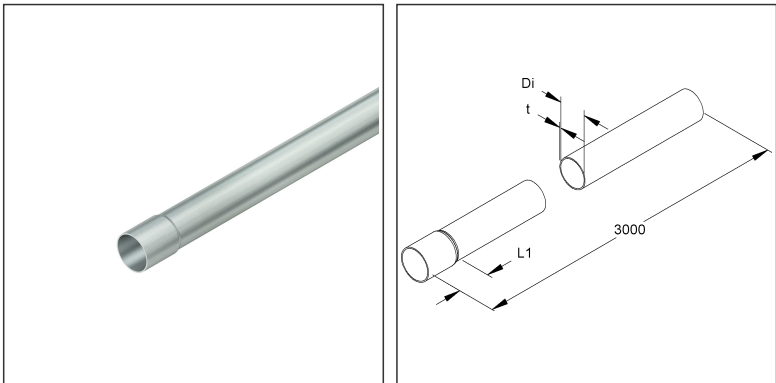

Article Description

Sleeve conduit, with sleeve integrally formed,conduit-A-Ø 32 mm,L=3000, Aluminium

Additional Price Information

|               |         |
|---------------|---------|
| Article group | FT-Rohr |
| quantity unit | m       |

Weight

|                          |              |
|--------------------------|--------------|
| Weight per quantity unit | 314 g / m    |
| Weight in kg per 100     | 31 kg / 100m |

# Technical Datasheet

## Electrical installation conduit

FM-MR 32 AL

the photorealistic images are to be considered as reference images

### Physical Article Dimensions

|              |          |
|--------------|----------|
| Height       | 34.60 mm |
| Width        | 34.60 mm |
| Depth/length | 3000 mm  |
| Diameter     | 34.60 mm |

### Packing Dimension

|                           |         |                                     |          |                    |          |
|---------------------------|---------|-------------------------------------|----------|--------------------|----------|
| <b>3 meters = 1 piece</b> |         | ✓ VP1-smallest packaging unit ( PU) |          | ✓ VP1-preferred PU |          |
| Lenght                    | 3000 mm | Width                               | 35.00 mm | Height             | 35.00 mm |
| Gross weight              | 0,94 kg | Volume                              | 0,003 m³ |                    |          |
| Min. quantity             | 3.00 m  | Max. Quantity                       | 3.00 m   |                    |          |

|                            |          |               |          |        |         |
|----------------------------|----------|---------------|----------|--------|---------|
| <b>750 meters = 1 rack</b> |          |               |          |        |         |
| Lenght                     | 3000 mm  | Width         | 1162 mm  | Height | 1120 mm |
| Gross weight               | 333 kg   | Volume        | 3,904 m³ |        |         |
| Min. Quantity              | 750.00 m | Max. Quantity | 750.00 m |        |         |

### Tender Text

Sleeve conduit-fm acc. to DIN EN 61386-1 / DIN EN 61386-21, with sleeve moulded on one side, can be used for extreme mechanical requirements and strong connections due to its heavy impact resistance and heavy compressive strength. Dimensions (approx. dimensions) conduit-Ø outside : 32 mm  
Inside-Ø Di : 29,6 mm  
Material thickness t : 1,2 mm Length of the sleeve inside : 36 mm  
Delivery length L total : 3000 mm  
Usable cross section : 688 mm²  
Classification : 4456 for heavy mechanical loads  
Surface : pressed / bright-machined  
Material : Aluminium alloy, Material No. 3.3206 EN AW 6060 T5  
Fintech Model No. : FM-MR 32 AL  
EP Material\_\_\_\_\_ EP Wage\_\_\_\_\_  
Unit price per meter

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 27.06.2024  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                       |          |
|-----------------------|----------|
| Country of origin     |          |
| Customs tariff number | 76082081 |

# Technical Datasheet

## Electrical installation conduit

FM-MR 32 AL

the photorealistic images are to be considered as reference images

### Related items

### Accessories

| Model No.  | Description                                                                                                         |
|------------|---------------------------------------------------------------------------------------------------------------------|
| IEE 32     | End nozzle, for conduit-Ø 32 mm, inner and outer thighs of equal lengt, Kunststoff, PVC-weich, RAL 7001, silbergrau |
| IEE 32 AL  | End nozzle, for conduit-Ø 32 mm, without inner thighs, Aluminium                                                    |
| IEEK 32    | End nozzle, for conduit-Ø 32 mm, with short inner thigh, plastics, polyethylene, RAL 7035, light grey               |
| IEEK 32 A  | End nozzle, for conduit-Ø 32 mm, with short inner thigh, plastics, polyethylene, colour black                       |
| IESB 32 AL | Plug-in conduit elbow 90°, for conduit-Ø 32 mm, inner radius 90 mm, Aluminium                                       |
| IK 32 AL   | Clamping chip, for conduit-Ø 32 mm, aluminium                                                                       |
| IPA 32 AL  | Conduit- a. cable distance clamp, f. conduit-Ø M32, clamp. range 29-38, Aluminium                                   |