


Plug-In Conduit-IEC

IESR 50 AL

EAN Code: 4046933001123
Smallest packaging unit: 3 m
quantity unit: m M

the photorealistic images are to be considered as reference images

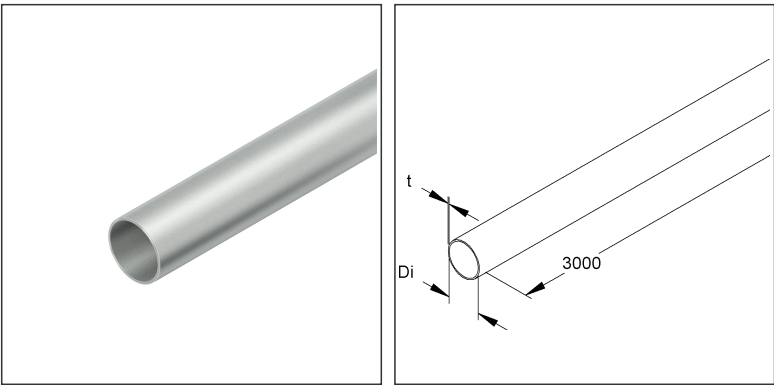

Article Description

Plug-in conduit, outside-Ø 50 mm, inside-Ø 47,4 mm, length 3000 mm, aluminium

Additional Price Information

Article group	FT-Rohr
quantity unit	m

Weight

Weight per quantity unit	538 g / m
Weight in kg per 100	54 kg / 100m

Physical Article Dimensions

Height	50.00 mm
Width	50.00 mm
Depth/length	3000 mm
Diameter	50.00 mm

Technical Datasheet

Electrical installation conduit

IESR 50 AL

the photorealistic images are to be considered as reference images

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	50.00 mm	Height	50.00 mm
Gross weight	1,61 kg	Volume	0,006 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

15 meters = 1 bundle			
Gross weight	8,06 kg		
Min. Quantity	15.00 m	Max. Quantity	15.00 m

945 meters = 1 rack					
Gross weight	605 kg	Volume	3,904 m³		
Min. Quantity	945.00 m	Max. Quantity	945.00 m		
Lenght	3000 mm	Width	1162 mm	Height	1120 mm

Tender Text

Plug-in conduit acc. to DIN EN 61386-1 / DIN EN 61386-21, can be used for extreme mechanical requirements due to heavy compressive strength.
Dimensions (approx. dimensions) conduit-Ø outside : 50 mm
Inside-Ø Di : 47,4 mm
Material thickness t : 1,3 mm
Delivery length L : 3000 mm
Usable cross-section : 1764 mm² Classification 4456 for heavy mechanical loads
Surface : pressed / bright-machined
Material : Aluminium alloy, Material No. 3.3206 EN AW 6060 T66
Fintech Model No. : IESR 50 AL
EP Material _____ EP Wage _____
Unit price per meter _____

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	
Customs tariff number	76109090

Technical Datasheet

Electrical installation conduit

IESR 50 AL

the photorealistic images are to be considered as reference images

Related items

Accessories

Model No.	Description
IEE 50	End nozzle, for conduit-Ø 50 mm, inner and outer thighs of equal lengt, plastics, PVC-soft, RAL 7001, silver grey
IEE 50 AL	End nozzle, for conduit-Ø 50 mm, without inner thighs, aluminium
IEEK 50	End nozzle, for conduit-Ø 50 mm, with short inner thigh, plastics, polyethylene, RAL 7035, light grey
IEEK 50 A	End nozzle, for conduit-Ø 50 mm, with short inner thigh, plastics, polyethylene, colour black
IESB 50 AL	Plug-in conduit elbow 90°, for conduit-Ø 50 mm, inner radius 125 mm, aluminium
IESM 50 AL	Plug-in sleeve, for conduit-Ø 50 mm, length 90 mm, aluminium
IK 50 AL	Clamping chip, for conduit-Ø 50 mm, aluminium
IPA 50 AL	Conduit- c. distance clamp, pipe-Ø50 mm,cab. clamping range -Ø47-55 mm, aluminium, with mounting slot