


Plug-In Conduit-IEC

IESR 63 AL

EAN Code: 4046933001130
 Smallest packaging unit:3 m
 quantity unit:m M

the photorealistic images are to be considered as reference images

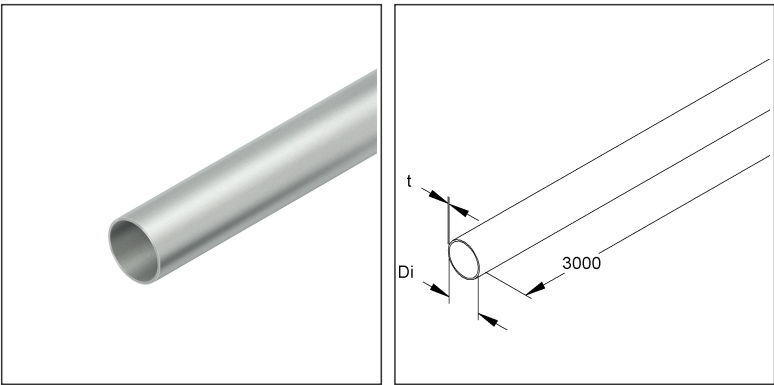

Article Description

Plug-in conduit, outside-Ø 63 mm, inside-Ø 60 mm, length 3000 mm, aluminium

Additional Price Information

Article group	FT-Rohr
quantity unit	m

Weight

Weight per quantity unit	783 g / m
Weight in kg per 100	78 kg / 100m

Physical Article Dimensions

Height	63.00 mm
Width	63.00 mm
Depth/length	3000 mm
Diameter	63.00 mm

Technical Datasheet

Electrical installation conduit

IESR 63 AL

the photorealistic images are to be considered as reference images

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	63.00 mm	Height	63.00 mm
Gross weight	2,35 kg	Volume	0,009 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

15 meters = 1 bundle			
Gross weight	12 kg		
Min. Quantity	15.00 m	Max. Quantity	15.00 m

630 meters = 1 rack					
Gross weight	591 kg	Volume	3,904 m³		
Min. Quantity	630.00 m	Max. Quantity	630.00 m		
Lenght	3000 mm	Width	1162 mm	Height	1120 mm

Tender Text

Plug-in conduit acc. to DIN EN 61386-1 / DIN EN 61386-21, can be used for extreme mechanical requirements due to heavy compressive strength.
Dimensions (approx. dimensions) conduit-Ø outside : 63 mm
Inside-Ø Di : 60 mm
Material thickness t : 1,5 mm
Delivery length L : 3000 mm
Usable cross-section : 2826 mm² Classification 4456 for heavy mechanical loads
Surface : pressed / bright-machined
Material : Aluminium alloy, Material No. 3.3206 EN AW 6060 T66
Fintech Model No. : IESR 63 AL
EP Material _____ EP Wage _____
Unit price per meter _____

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	
Customs tariff number	76109090

Technical Datasheet

Electrical installation conduit

IESR 63 AL

the photorealistic images are to be considered as reference images

Related items

Accessories

Model No.	Description
IEE 63	End nozzle, for conduit-Ø 63 mm, inner and outer thighs of equal lengt, plastics PVC-soft, RAL 7001, silver grey
IEE 63 AL	End nozzle, for conduit-Ø 63 mm, without inner thighs, aluminium
IEEK 63	End nozzle, for conduit-Ø 63 mm, with short inner thigh, plastics, polyethylene, RAL 7035, light grey
IEEK 63 A	End nozzle, for conduit-Ø 63 mm, with short inner thigh, plastics, polyethylene, colour black
IESB 63 AL	Plug-in conduit elbow 90°, for conduit-Ø 63 mm, inner radius 220 mm, aluminium
IESM 63 AL	Plug-in sleeve, for conduit-Ø 63 mm, length 105 mm, aluminium
IK 63 AL	Clamping chip, for conduit-Ø 63 mm, aluminium
IPA 63 AL	Conduit- c. distance clamp, pipe-Ø63 mm,cab. clamping range -Ø55-63 mm, aluminium, with mounting slot