


GRP-Cable Ladders

pultruded, with unperforated C-profile rungs open at the top, slot width approx. 15 mm

UL 53.200

EAN Code: 4013339957965
Smallest packaging unit: 6 m
quantity unit: m M

the photorealistic images are to be considered as reference images

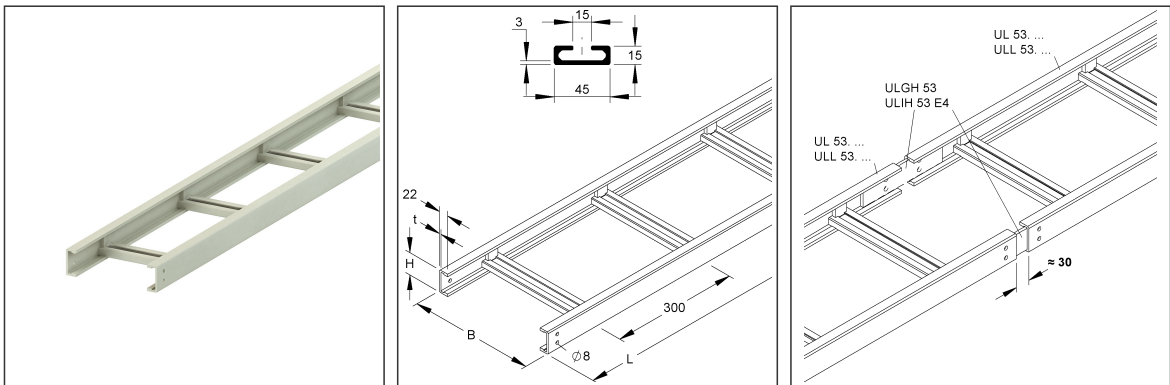

Article Description

GRP-cable ladders, 53x200x6000 mm, with unperforated rungs, glass fiber reinforced polyester, pultruded, RAL 7032, pebble grey

Additional Price Information

Article group	N15
quantity unit	m

Weight

Weight per quantity unit	1,160 kg / m
Weight in kg per 100	116 kg / 100m

Technical Datasheet

Cable Ladder System

UL 53.200


the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	53.00 mm
Width	200.00 mm
Depth/length	6000 mm

Load Specifications

Please contact us for larger or different support distances. Load values apply to cable tray lengths, mounted in the horizontal plane, horizontal running direction with several support distances.

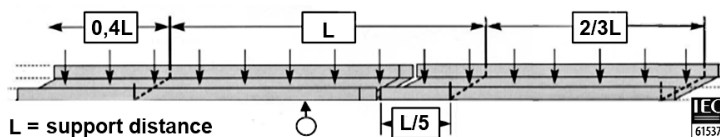

UL 53 series - Maximum loads		
Ladder length (m)	Support span (m)	Maximum load (kN/m)
3	1	1,6
	1,5	1,6
6	1	1,6
	1,5	1,6
	2	1,6
	3	0,5

Note: The deflection of the cable ladders was measured with a positioning of the connectors of L/5 of the fastening distance between 2 brackets. If this distance is not maintained, the deflection can increase by up to 30%.

Packing Dimension

6 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	6000 mm	Width	200.00 mm	Height	53.00 mm
Gross weight	6,96 kg	Volume	0,064 m³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		

Tender Text

GRP cable ladder according to DIN EN 61537, pultruded, consisting of U-shaped unperforated side rails but with connector perforations for the connection and open, clamped, unperforated rungs made of C-profile with a slot width of approx. 15 mm, for horizontal installation, halogen-free.

The rungs are fastened with a metal-free, patented clamp attachment, so the cable ladder is made of 100% glass fiber reinforced plastic (GRP).

When installing the cable ladder, a mounting distance of approx. 30 mm must be taken into account.

Dimensions (approx. dimensions) H x W : 53 x 200 mm

Material thickness spar : 4 mm

Rung spacing : 300 mm

Side rail perforation: Ø 8 mm

center distance : 20 mm

Technical Datasheet

Cable Ladder System

UL 53.200

the photorealistic images are to be considered as reference images

Tender Text

Delivery length L : 6000 mm
Usable cross-section : 4872 mm²
Material : UP-GF (glass fibre reinforced polyester)
Colour : pebble grey RAL : 7032 (similar)
NIEDAX Model No. : UL 53.200
EP Material_____ EP Wage_____
Unit price/metre

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	FR
Customs tariff number	39259020

Related items

Barrier strip

Model No.	Description
ULTL 53	GRP-barrier strip for cable ladder, 30x3000 mm, glass fiber reinforced polyester, pressed, RAL 7032, pebble grey