




Cable Ladder

rung spacing 300 mm, with continuously perforated side profiles, with riveted, upwardly open rungs made of C-profiles with 11 mm slot width

KL 60.503 E5

EAN Code: 4013339730223
Smallest packaging unit: 6 m
quantity unit: m M

the photorealistic images are to be considered as reference images

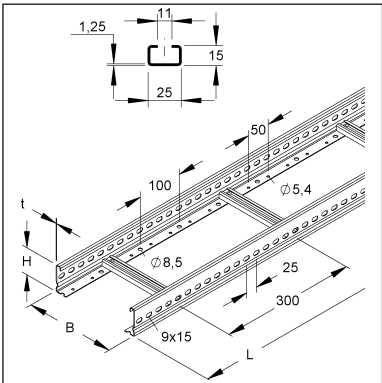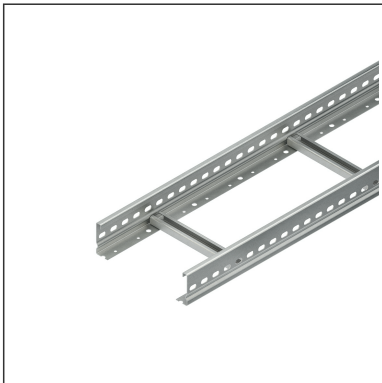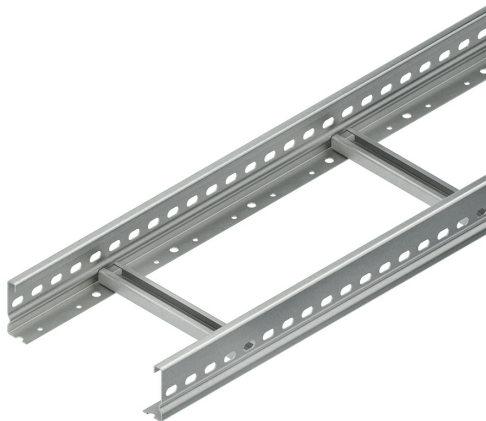

Article Description

Cable ladder, 60x500x6000 mm, t=1,5 mm, perforated, stainless steel, material code: 1.4571

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	3,212 kg / m
Weight in kg per 100	321 kg / 100m

Technical Datasheet

Cable Ladder System


KL 60.503 E5

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	60.00 mm
Width	500 mm
Depth/length	6000 mm

Load Specifications

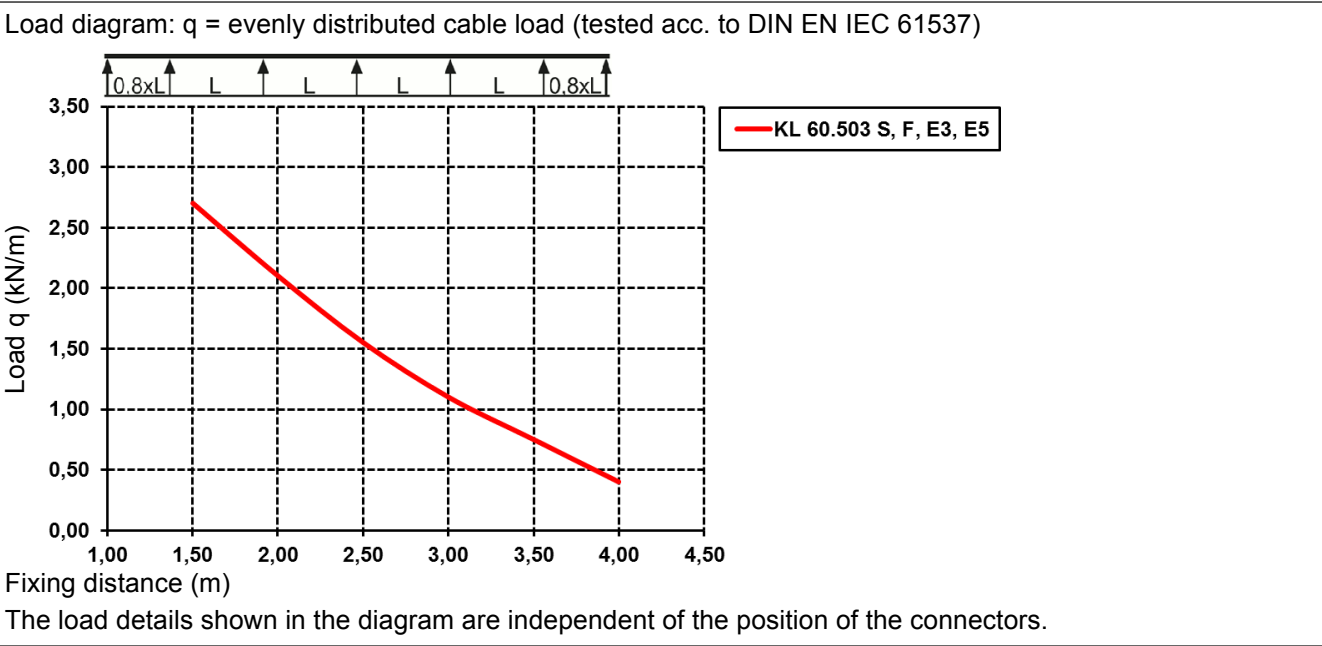

Packing Dimension

6 meters = 1 piece		✓ VP1-smallest packaging unit (PU)	✓ VP1-preferred PU		
Lenght	6000 mm	Width	500 mm	Height	60.00 mm
Gross weight	19 kg	Volume	0,180 m³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		

Tender Text

Cable ladder acc. to DIN EN 61537, with continuously perforated and profiled side beams, with riveted rungs made of C-profiles with 11 mm slot width.
 Suitable U-clamps (BA...).

Dimensions (approx. dimensions)
 H x W : 60 x 500 mm
 Material thickness beam : 1.5 mm
 Distance between rungs : 300 mm
 Side beam perforation : 9 x 15 mm
 centre distance : 25 mm
 Bottom perforation : Ø 8.5 and Ø 5.4 mm
 centre distance : 100 mm and 50 mm
 Delivery length L : 6000 mm
 Transport length : 6000 mm + W
 Usable cross-section : 21550 mm²
 Material : stainless steel, material no. 1.4571, AISI 316Ti
 NIEDAX Model No. : KL 60.503 E5

Technical Datasheet

Cable Ladder System

KL 60.503 E5

the photorealistic images are to be considered as reference images

Tender Text

EP Material_____ EP Wage_____
Unit price/meter

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Federal State of Origin	RP
Customs tariff number	73089059

Related items

Barrier strip

Model No.	Description
RW 35 E5	Barrier strip, 30x3000 mm, t=0,8 mm, stainless steel, material code: 1.4571, AISI 316Ti, incl. accessories

Connector

Model No.	Description
KSV 60 E5	Splice plate for cable ladder, height 60 mm, stainless steel, mat. code: 1.4571, washed, incl. accessories