


GRP-Overhead Hanger

pultruded, double C-profile

FPDS 300/AC

EAN Code: 4013339955893  
 Smallest packaging unit:1 pc.

the photorealistic images are to be considered as reference images

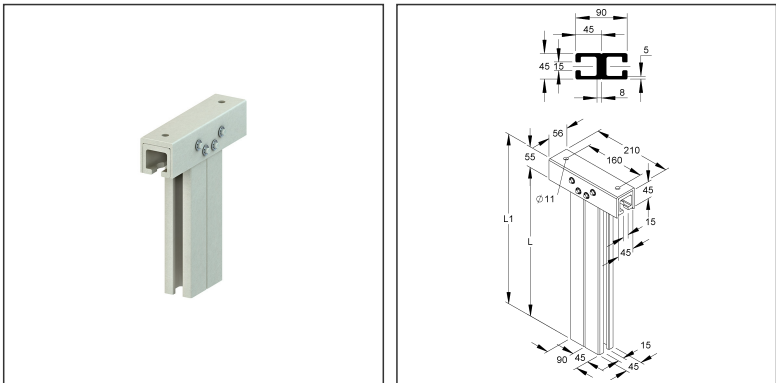

Article Description

GRP-overhead hanger, double C-profile, 90x45x300 mm, glass fiber reinforced polyester, pultruded, RAL 7032, pebble grey

Excl. Accessories

exclusive bolting      Required fixing accessories FPBGV 10 E4 (please order separately).

Additional Price Information

|               |      |
|---------------|------|
| Article group | N15  |
| quantity unit | pcs. |

Weight

|                          |                 |
|--------------------------|-----------------|
| Weight per quantity unit | 960 g / pcs.    |
| Weight in kg per 100     | 96 kg / 100pcs. |

# Technical Datasheet

## Supporting structure

### FPDS 300/AC

the photorealistic images are to be considered as reference images

#### Physical Article Dimensions

|              |          |
|--------------|----------|
| Height       | 45.00 mm |
| Width        | 90.00 mm |
| Depth/length | 300 mm   |

#### Packing Dimension

|                          |           |                                     |           |        |          |
|--------------------------|-----------|-------------------------------------|-----------|--------|----------|
| <b>1 piece = 1 piece</b> |           | ✓ VP1-smallest packaging unit ( PU) |           |        |          |
| Lenght                   | 300 mm    | Width                               | 90.00 mm  | Height | 45.00 mm |
| Gross weight             | 0,96 kg   | Volume                              | 0,001 m³  |        |          |
| Min. quantity            | 1.00 pcs. | Max. Quantity                       | 1.00 pcs. |        |          |

#### Tender Text

GRP overhead hanger, pultruded, manufactured with particularly durable acrylic resin, two vertical double C-profiles with screwed-on horizontal C-profile fastening rail, for mounting both sides of the bracket, please order FPBGV 10 E4 fastening accessories separately, halogen-free. The load specifications on tension are only valid with sufficient anchoring to the supporting substrate. The introduction of the loads into the structure must be agreed with the site management. The applicable guidelines and regulations must be observed.

Use for : Bracket FPAM.../AC ≤ 300 mm length

FPAP.../AC ≤ 600 mm length

Dimensions (approx. Dimensions)

Fastening rail C-profile H x W x L : 53 x 53 x 210 mm Fastening holes : 2 x Ø 11 mm

centre distance : 160 mm

two vertical C-profiles H x W x L each : 45 x 45 x 300 mm Material thickness C-profile leg : 5 mm

Material thickness C-profile back : 8 mm

Slot width : 15 mm

total length of suspension rod L1 : 355 mm

maximum tensile load on both sides : 1.5 kN each

Material : UP-GF (glass fibre reinforced polyester)

Colour : pebble grey RAL : 7032 (similar)

NIEDAX Model no. : FPDS 300/AC

EP Material\_\_\_\_\_ EP Wage\_\_\_\_\_

Unit price/piece

#### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 27.06.2024  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

#### Origin & International Trade

|                       |          |
|-----------------------|----------|
| Country of origin     | FR       |
| Customs tariff number | 39259020 |