

GRP-Cable Routing Duct

pultruded, with bottom perforation, with cover



LFG 50.100

EAN Code: 4013339948574

Smallest packaging unit: 2 m

quantity unit: m M

the photorealistic images are to be considered as reference images

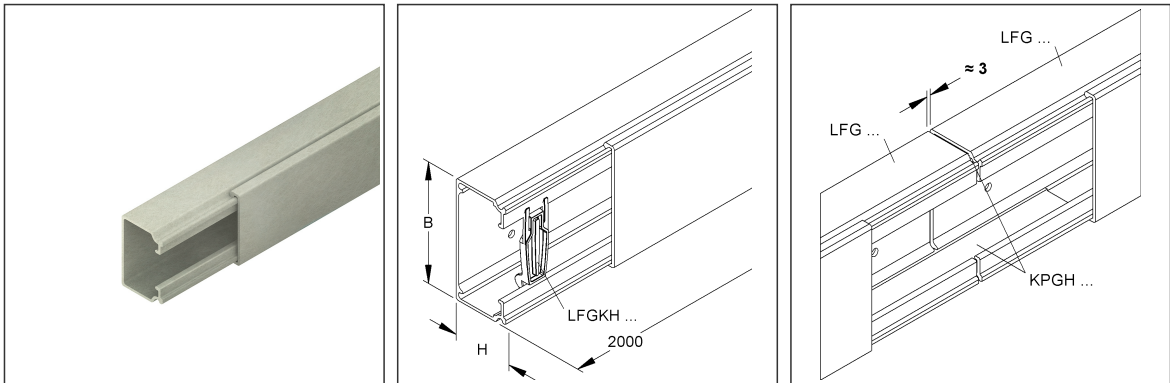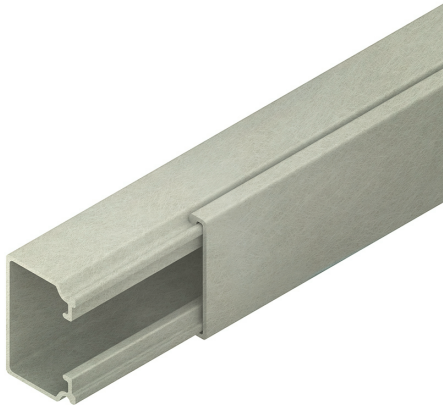

Article Description

GRP-cable routing duct with cover, 50x100x2000 mm, glass fiber reinforced polyester, pultruded, RAL 7032, pebble grey

Incl. accessories

4 LFGKH 100

Additional Price Information

Article group	N15
quantity unit	m

Weight

Weight per quantity unit	1,600 kg / m
Weight in kg per 100	160 kg / 100m

Technical Datasheet

Cable routing duct

LFG 50.100

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	50.00 mm
Width	100.00 mm
Depth/length	2000 mm

Packing Dimension

2 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	2000 mm	Width	100.00 mm	Height	50.00 mm
Gross weight	3,2 kg	Volume	0,010 m³		
Min. quantity	2.00 m	Max. Quantity	2.00 m		

378 meters = 1 rack

Gross weight	605 kg		
Min. Quantity	378.00 m	Max. Quantity	378.00 m

Tender Text

GRP cable routing duct, pultruded, with cover and double-row fastening holes in the bottom, including 4 cable retaining clips LFGKH ... each 2 m delivery length, halogen-free.

Cable retaining clips : 4 x LFGKH 100

Dimensions (approx. dimensions) H x W : 50 x 100 mm

Material thickness t : 2.5 mm

double-row fastening holes in the bottom : Ø 6 mm Bottom hole distance : 190 mm

Row distance : 40 mm

Delivery length : 2000 mm

Usable cross-section : 2850 mm²

Material : UP-GF (glass fibre reinforced polyester)

Colour : pebble grey RAL : 7032 (similar)

Material cable retaining clip : PC (polycarbonate)

Colour : ruby red RAL : 3003 (similar)

NIEDAX Model no. : LFG 50.100

EP Material_____ EP Wage_____

Unit price/meter

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	FR
Customs tariff number	39259020

Technical Datasheet

Cable routing duct

LFG 50.100

the photorealistic images are to be considered as reference images

Related items

Barrier strip

Model No.	Description
FKM 6X20 E4	Cup screw with slot, nut, washer, DIN 7093-1, M6, length =20 mm, Edelstahl, Werkstoff-Nr.: 1.4401, 1.4404, inkl. Mutter u. Scheibe
LFGT 50	GRP-barrier strip, 50x2000 mm, glass fiber reinforced polyester, pultruded, RAL 7032, pebble grey
LFGT 50/M	GRP-barrier strip, 50x2000 mm, pre-assembled, glass fiber reinforced polyester, pultruded, RAL 7032, pebble grey