



**C-Profile Type 2996Z**

C-profile, slot width 22 mm, perforated

2996Z/4500 E3L

EAN Code: 4013339078646  
 Smallest packaging unit:1 pc.

the photorealistic images are to be considered as reference images

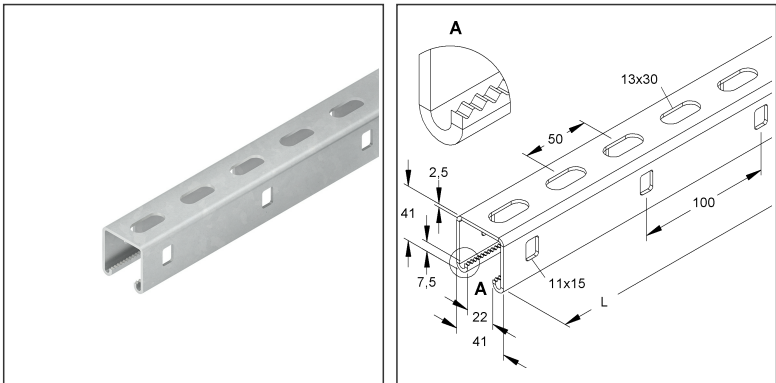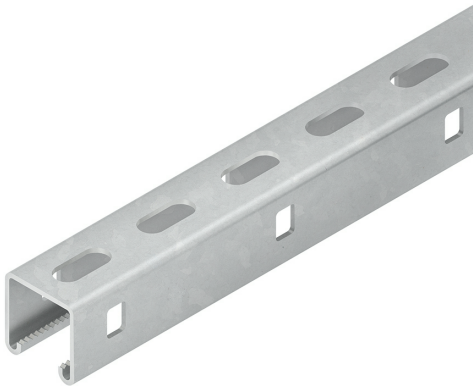

**Article Description**

C-profile, slot width 22 mm, 41x41x4500 mm, perforated, stainless steel, material code: 1.4301, 1.4303, interlocked

**Weight**

|                          |                  |
|--------------------------|------------------|
| Weight per quantity unit | 11 kg/ pcs.      |
| Weight in kg per 100     | 1092 kg/ 100pcs. |

**Physical Article Dimensions**

|              |          |
|--------------|----------|
| Height       | 41.00 mm |
| Width        | 41.00 mm |
| Depth/length | 4500 mm  |

# Technical Datasheet

## Niedax rails

2996Z/4500 E3L

the photorealistic images are to be considered as reference images

### Additional Price Information

|               |      |
|---------------|------|
| Article group | N13  |
| quantity unit | pcs. |

### Packing Dimension

|                          |           |                                     |           |        |          |
|--------------------------|-----------|-------------------------------------|-----------|--------|----------|
| <b>1 piece = 1 piece</b> |           | ✓ VP1-smallest packaging unit ( PU) |           |        |          |
| Lenght                   | 4500 mm   | Width                               | 41.00 mm  | Height | 41.00 mm |
| Gross weight             | 11 kg     | Volume                              | 0,008 m³  |        |          |
| Min. quantity            | 1.00 pcs. | Max. Quantity                       | 1.00 pcs. |        |          |

### Tender Text

C-profile model 2996Z with toothing, bottom and sides continuously perforated. Sliding nut GMZ M...-22 E5 and screws must be ordered separately. Suitable U-clamps (BU... and BUK...). The protective cap SKC 88/96 must be fitted in personal danger areas. To ensure that the protective cap can be fitted without problems, a distance of at least 30 mm from the end of the profile must be maintained.

Dimensions (approx. dimensions)

Height H x width W x material thickness t : 41 x 41 x 2.5 mm

Slot width : 22 mm

Profile bottom perforation : 13 x 30 mm

central distance : 50 mm

Profile side perforation : 11 x 15 mm

central distance : 100 mm

Delivery length L : 4500 mm

Material : stainless steel, material No. 1.4301, AISI 304

NIEDAX Model No. : 2996Z/4500 E3L

EP Material\_\_\_\_\_ EP Wage\_\_\_\_\_

Unit price/piece

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 27.06.2024  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                       |          |
|-----------------------|----------|
| Country of origin     | DE       |
| Customs tariff number | 73269098 |